

StarTech.com 5 Port Unmanaged Industrial Gigabit Ethernet Switch - DIN Rail / Wall-Mountable

Brand : StarTech.com

Product code: IES51000

Product name : 5 Port Unmanaged Industrial Gigabit Ethernet Switch - DIN Rail / Wall-Mountable

StarTech.com 5 Port Unmanaged Industrial Gigabit Ethernet Switch - DIN Rail / Wall-Mountable Network Switch - Rugged IP30 Gigabit Switch  
StarTech.com 5 Port Unmanaged Industrial Gigabit Ethernet Switch - DIN Rail / Wall-Mountable. Switch type: Unmanaged. Basic switching RJ-45 Ethernet ports type: Gigabit Ethernet (10/100/1000), Basic switching RJ-45 Ethernet ports quantity: 5. Full duplex. Switching capacity: 2 Gbit/s. Networking standards: IEEE 802.1p, IEEE 802.3, IEEE 802.3ab, IEEE 802.3ad, IEEE 802.3az, IEEE 802.3u. Power connector: DC-in jack. Wall mountable



Management features		Power	
Switch type *	Unmanaged	Power consumption (typical)	3.63 W
Ports & interfaces		Power over Ethernet (PoE)	
Basic switching RJ-45 Ethernet ports quantity *	5	Power over Ethernet (PoE) *	✗
Basic switching RJ-45 Ethernet ports type *	Gigabit Ethernet (10/100/1000)	Operational conditions	
Power connector	DC-in jack	Operating temperature (T-T)	-40 - 75 °C
Network		Storage temperature (T-T)	-40 - 85 °C
Networking standards *	IEEE 802.1p, IEEE 802.3, IEEE 802.3ab, IEEE 802.3ad, IEEE 802.3az, IEEE 802.3u	Operating relative humidity (H-H)	5 - 95%
10G support *	✗	Weight & dimensions	
Full duplex	✓	Width	89 mm
Link aggregation	✓	Depth	111 mm
Auto MDI/MDI-X	✓	Height	28 mm
Data transmission		Weight	328 g
Switching capacity *	2 Gbit/s	Packaging content	
Store-and-forward	✓	Manual	✓
Jumbo frames support	✓	Packaging data	
Design		Wall mounting kit	✓
Product colour	Black	Terminal block included	✓
Housing material	Steel	Mounting brackets included	✓
LED indicators	Activity, Link, Power	Screws included	✓
International Protection (IP) code	IP30	DIN rail included	✓
Wall mountable	✓	Package width	139 mm
Performance		Package depth	176 mm
Maximum cable length	100 m	Package height	83 mm
		Package weight	523 g


Performance		Certificates	
Buffer size	128 KB	Certification	CE, FCC, RoHS, REACH
Power		Logistics data	
Input voltage	12 - 58 V	Harmonized System (HS) code	85176990



0065030859318



065030859318

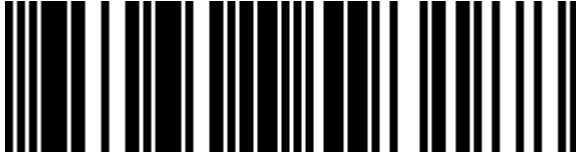

0650308593188



650308593188

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.