


- 1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL ELECTRICAL REGULATIONS.
- 2. REFER TO PRODUCT DOCUMENTATION FOR ADDITIONAL DETAILS PRIOR TO INSTALLATION AND SITE PREPARATION WORK.
- 3. ALL DIMENSIONS ARE IN MILLIMETERS [INCHES].
- 44. FRONT AND REAR ACCESS REQUIRED FOR SERVICE. MINIMUM REQUIRED FRONT/REAR CLEARANCE IS 36.0 [914].
- 5. NET WEIGHT OF THE EMPTY UNIT IS 85.2 kg [187.83 lb].
- 6. LOADING CAPACITY:
 - a) STATIC LOAD: 1200kg [2645.5 lb].
- b) DYNAMIC LOAD: 600kg [1322.7 Ib]
 7. TOP AND BOTTOM CABLE ENTRY USING APPROPRIATE CUSTOMER PROVIDED SOLUTION.
- 8. COLOR: BLACK.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE



IITLE: Easy RACK 48U OOmm W x 1000mm D w/o Side panels GENERAL ARRANGEMENT	ole	DWG NO: ER68	REV. O	
	,,,	DRAWN BY: JAYAPRAKASH	29-APR-21	FIRST
		ENGINEERWenjuan JIA/Xiaoying ZENG	29-APR-21	ANGLE
PROJECT: SUBMITTAL DRAWINGS SHEET 1 OF	3	APPROVED BY: Dazhang-Ivan SHI	29-APR-21	PROJECTION

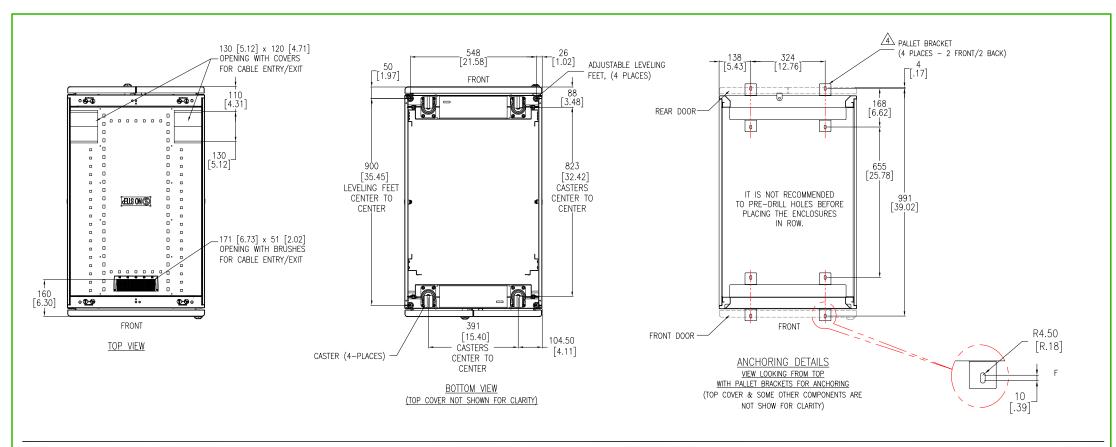


STABILIZING THE ENCLOSURE:

TO PREVENT THE ENCLOSURE FROM MOVING FROM ITS FINAL LOCATION

(IF NOT JOINED WITH ANOTHER COMPONENT, USE PALLET/ANCHORING BRACKET)

ATTACH THE PALLET/ANCHORING BRACKETS TO THE ENCLOSURE AS SHOWN.

USE CODE COMPLIANT FASTENERS TO SECURE THE ENCLOSURE TO THE FLOOR.

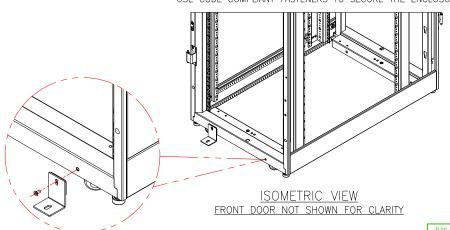

(4 PLACES - 2-FRONT/2-BACK)

ENLARGED VIEW


NOTES:


- 1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL ELECTRICAL REGULATIONS.
- 2. REFER TO PRODUCT DOCUMENTATION FOR ADDITIONAL DETAILS PRIOR TO INSTALLATION AND SITE PREPARATION WORK.
- 3. ALL DIMENSIONS ARE IN MILLIMETERS [INCHES].
- △ 4. PALLET/ANCHORING BRACKETS ARE PROVIDED WITH THE ENCLOSURE AND ARE SECURED
 TO THE ENCLOSURE AND PALLET FOR SHIPMENT. RETAIN THE PALLET BRACKETS FROM
 SHIPMENT. THESE BRACKETS ARE USED TO ANCHOR THE ENCLOSURE ONCE INSTALLED.
 PALLET/ANCHORING BRACKETS CAN BE INSTALLED EITHER INSIDE OR OUTSIDE THE
 EASY RACK WITH TWO AT FRONT AND TWO IN BACK.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



IND IN DACK.				
Easy RACK 48U Omm W x 1000mm D w/o Side panels TOP/BOTTOM & ANCHORING DETAILS		DWG NO: ER68	REV. O	
		DRAWN BY: JAYAPRAKASH	29-APR-21	FIRST
		ENGINEERWenjuan JIA/Xiaoying ZENG	29-APR-21	ANGLE
ROJECT: SUBMITTAL DRAWINGS	SHEET 2 OF 3	APPROVED BY: Dazhang-Ivan SHI	29-APR-21	PROJECTION

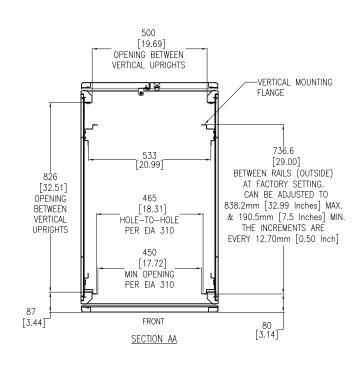

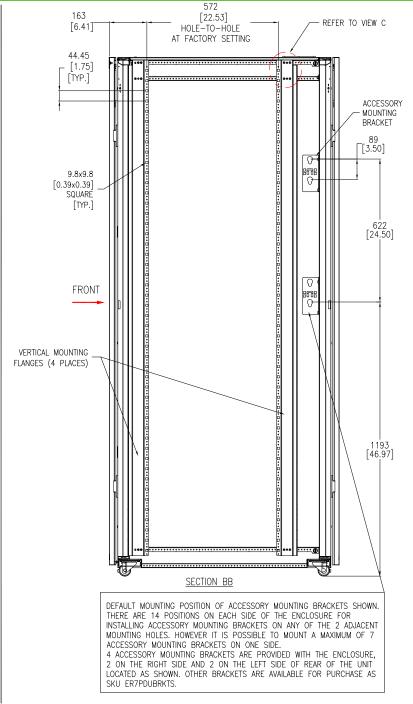

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL ELECTRICAL REGULATIONS.

2. REFER TO PRODUCT DOCUMENTATION FOR ADDITIONAL DETAILS PRIOR TO INSTALLATION AND SITE PREPARATION WORK.

3. ALL DIMENSIONS ARE IN MILLIMETERS [INCHES].

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE



TITLE: Easy RACK 48U 00mm W x 1000mm D w/o SECTION VIEWS	Side	nanels	DWG NO: ER68		
SECTION VIEWS	panoio	DRAWN BY: JAYAPRAKA	SH		
			ENGINEERWenjuan JIA/Xiaoying ZI	:NG	
PROJECT: SUBMITTAL DRAWINGS	SHEET	3 OF 3	APPROVED BY: Dazhang-Ivan	SHI	



12.70

[.50]

TYP

VIEW-C (ENLARGED)

VERTICAL

MOUNTING FLANGE