poly

POLY Studio X50 All-In-One Video Bar with TC8 Controller Kit

Brand : POLY

Product code: 83Z47AA

Product name : Studio X50 All-In-One Video Bar with TC8 Controller Kit

- Get your medium-sized conference rooms up and running in moments. No PC is required, and cloud service platform support is built right in. It's easy to install, and ideal for rooms up to 10 participants.
- Keep your eye on the action with intelligent camera framing and NoiseBlockAI technology – powered by machine learning. Get exquisite vocal pickup from our next gen mics. Share content over wired or wireless connections via dual monitors.
Studio X50 All-In-One Video Bar with TC8 Controller Kit

POLY Studio X50 All-In-One Video Bar with TC8 Controller Kit:

Simple video conferencing
Poly Studio X50 video bars simplify and enhance your hybrid meeting experience in medium-sized rooms – no matter what video collaboration software you use. Experience board-room quality audio and video, all optimized into one sleek bar.

Performance

Number of persons *	1 person(s)
Bluetooth	✔
Bluetooth version	5.0
Product colour *	Black, Grey
Product type *	Video collaboration bar

Video

HD type *	4K Ultra HD
Maximum video resolution *	3840 x 2160 pixels
Supported video modes	2160p
Supported graphics resolutions	800 x 600 (SVGA), 1024 x 768 (XGA), 1280 x 1024 (SXGA), 1280 x 720 (HD 720), 1400 x 1050 (SXGA+), 1680 x 1050 (WSXGA+), 1920 x 1080 (HD 1080), 1920 x 1200 (WUXGA), 3840 x 2160
Maximum frame rate	60 fps
Video formats supported	AVC, H.239, H.264, H.265

Audio

Built-in speaker(s)	✔
Voice codecs	G.711, G.722, G.722.1, G.728, G.729A
RMS rated power	20 W
Microphone pick-up range	7.62 m

Ports & interfaces

HDMI output ports quantity	2
HDMI input ports quantity	1
HDMI version	1.4
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity	2
USB 3.2 Gen 1 (3.1 Gen 1) Type-C ports quantity	1
Line-in	✔
PC Audio in	✔

Network

Ethernet LAN *	✔
Ethernet LAN data rates	10,100,1000 Mbit/s
Wi-Fi	✔
Wi-Fi standards	802.11a, 802.11b, 802.11g, Wi-Fi 4 (802.11n), Wi-Fi 5 (802.11ac)

Camera

Zoom capability	✔
Digital zoom	5x
Horizontal field of view	110°
Diagonal field of view	121°

Microphone

Number of microphones	2

Features

Cable lock slot	✔
Cable lock slot type	Kensington

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	15 - 80%
Storage temperature (T-T)	-40 - 70 °C
Storage relative humidity (H-H)	5 - 95%
Heat dissipation	65 BTU/h

Packaging content

Camera control unit included	✔
Cables included	HDMI, LAN (RJ-45)
AC adapter included	✔
Mounting kit	✔
Camera included	✔

||||||| |||||||||||| ||||||||||| |||

0197497448894

|||||| |||| |||| |||| ||||| ||||||| ||| ||

197497448894

||||||||| |||||||||| |||||||| |||||
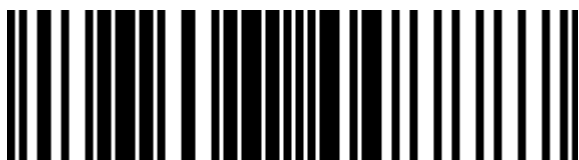
0197497448887

|||||| |||| |||| |||| ||||| ||||||| ||| ||

197497448887

|||||||||||| ||||||||||||| |||||
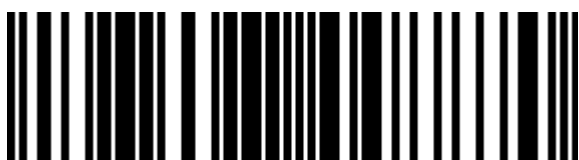
0197497448870

|||||| |||| |||| |||||| ||||| |||||| ||| ||

197497448870

||||||||| |||||||| ||||||| ||| ||
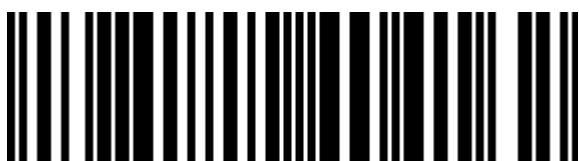
0198122404162

|||||| |||| |||| |||||| |||| |||| |||| ||| ||

198122404162

|||||||| |||||||| ||||||| ||| ||

0197961922936

|||||| |||| |||| |||| |||| |||| |||| ||| ||

197961922936

|||||||| ||||||||| ||||| |||| || |||

0197961954623

|||||| |||| |||| |||| |||| |||| |||| ||| ||

197961954623
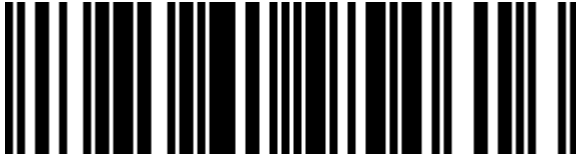
0197961954616

197961954616

0197961954609

197961954609
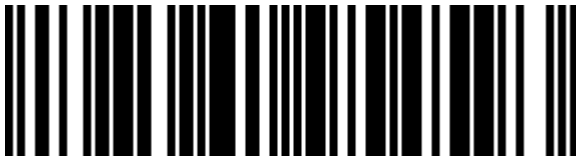
0197961954593

197961954593

0197961954579

197961954579

0197961954630

197961954630

458271242 8885