

INSTALLATION INSTRUCTIONS

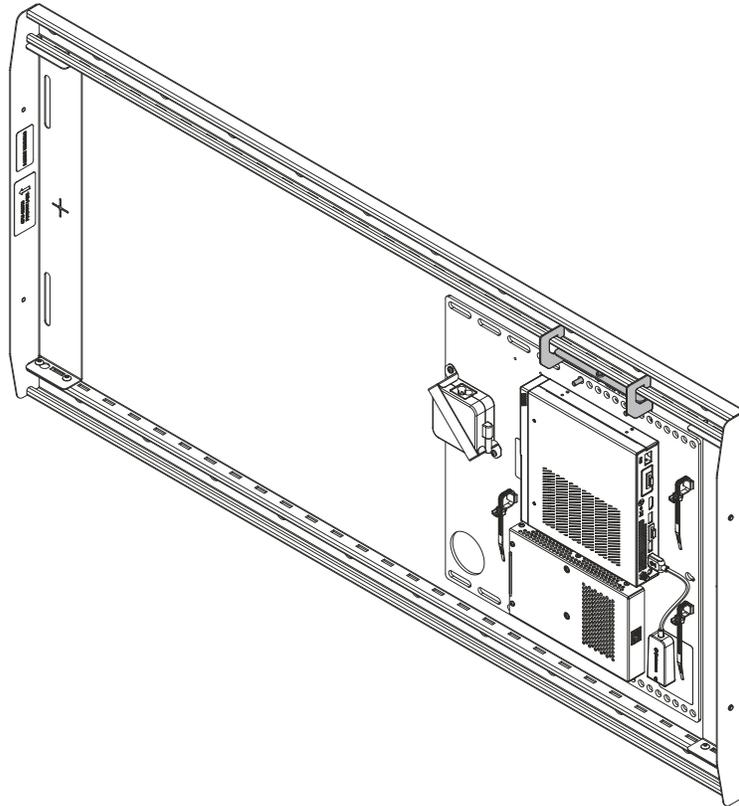

Flex Kit Adapter Bracket

CHIEF[®]

A brand of  legrand[®]

AS3A102

DISCLAIMER

Legrand | AV and its affiliated corporations and subsidiaries (collectively "Legrand | AV"), intend to make this manual accurate and complete. However, Legrand | AV makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Legrand | AV makes no representation of warranty, expressed or implied, regarding the information contained herein. Legrand | AV assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.

Chief® is a registered trademark of Legrand AV Inc.

! IMPORTANT SAFETY INSTRUCTIONS

! WARNING: A WARNING alerts you to the possibility of serious injury or death if you do not follow the instructions.

! CAUTION: A CAUTION alerts you to the possibility of damage or destruction of equipment if you do not follow the corresponding instructions.

! WARNING: Failure to read, thoroughly understand, and follow all instructions can result in serious personal injury, damage to equipment, or voiding of factory warranty! It is the installer's responsibility to make sure all components are properly assembled and installed using the instructions provided.

! WARNING: Exceeding the weight capacity can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the combined weight of all components attached to the AS3A102 accessory does exceed 8 lbs (36 kg).


! WARNING: Use this mounting system only for its intended use as described in these instructions. Do not use attachments not recommended by the manufacturer.

! WARNING: Never operate this mounting system if it is damaged. Return the mounting system to a service center for examination and repair.


! WARNING: Do not use this product outdoors.

--SAVE THESE INSTRUCTIONS--


DIMENSIONS

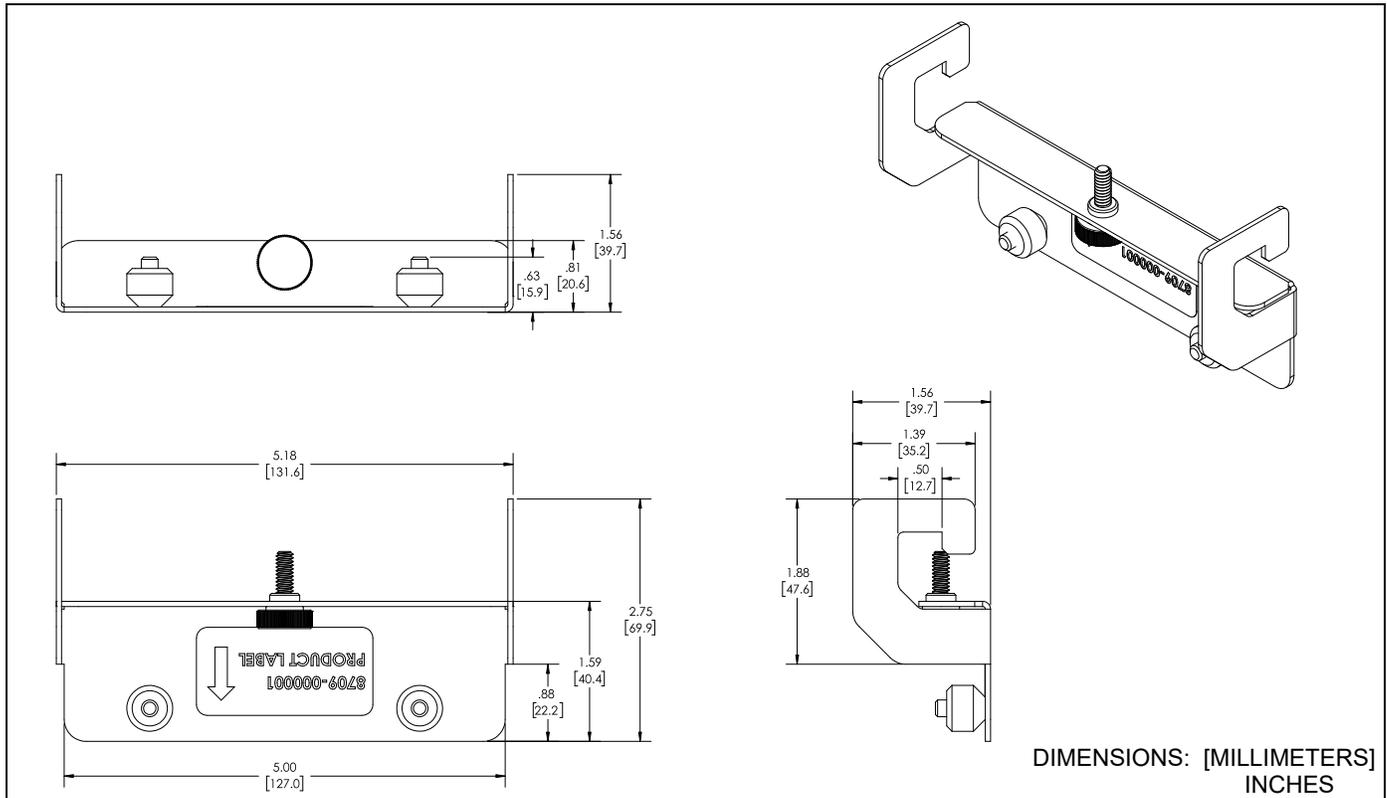

DIMENSIONS (CONTINUED)

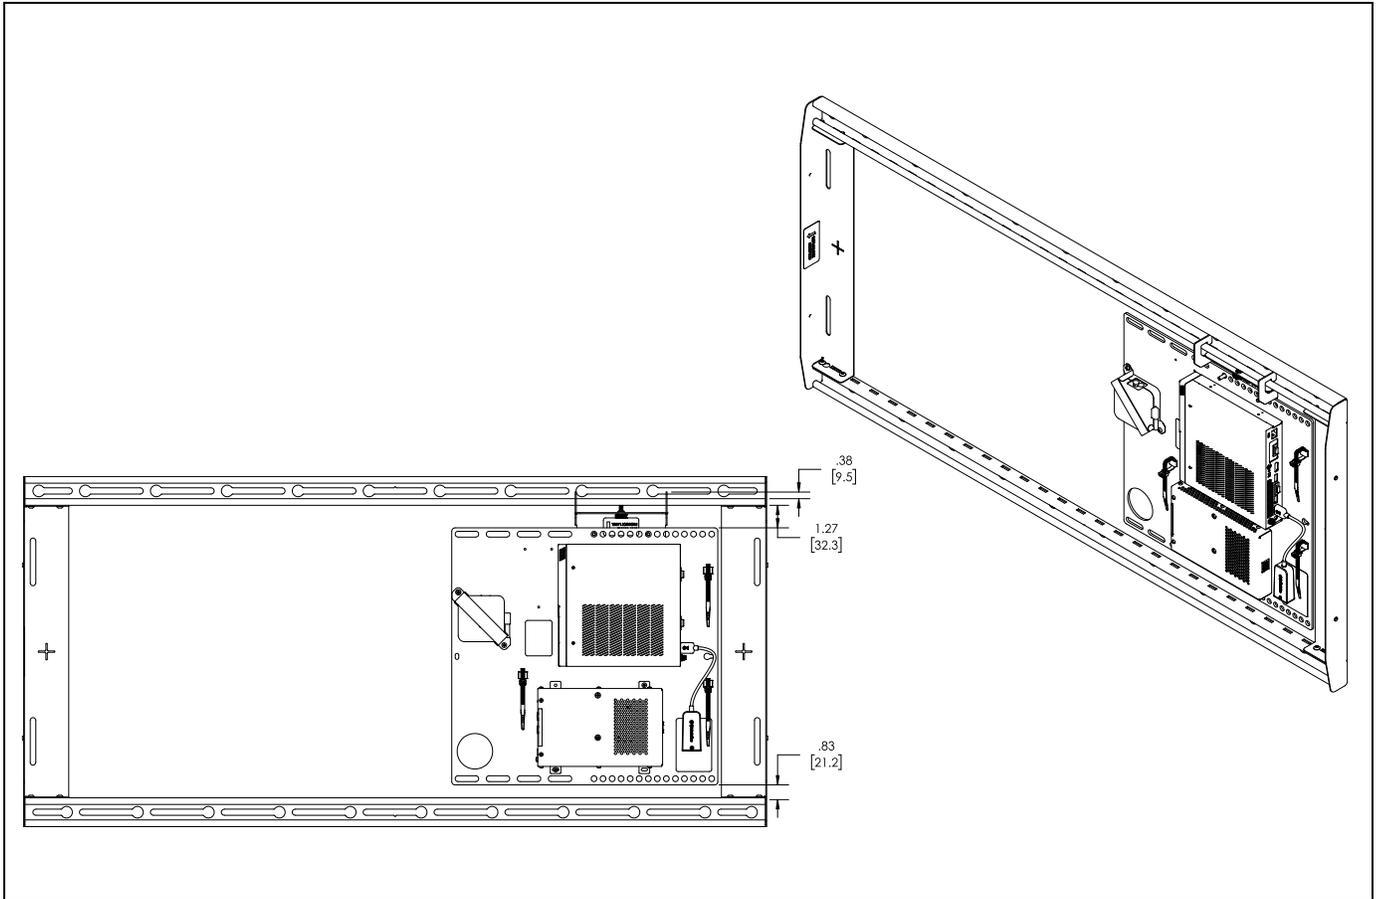

PARTS FOR INSTALLATION (NO TOOLS REQUIRED)

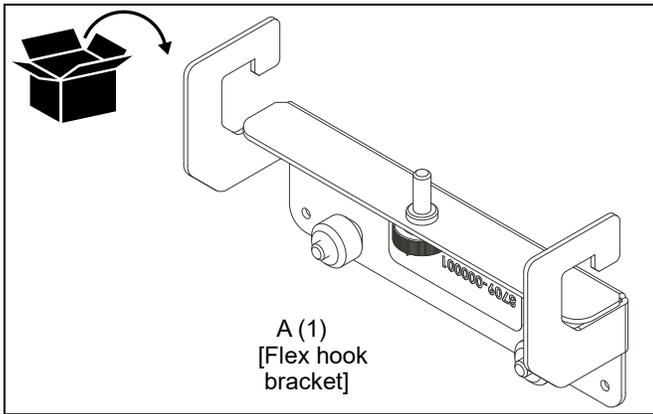

ASSEMBLY AND INSTALLATION

1. Remove two thumb nuts from flex hook bracket (A). (See Figure 1)

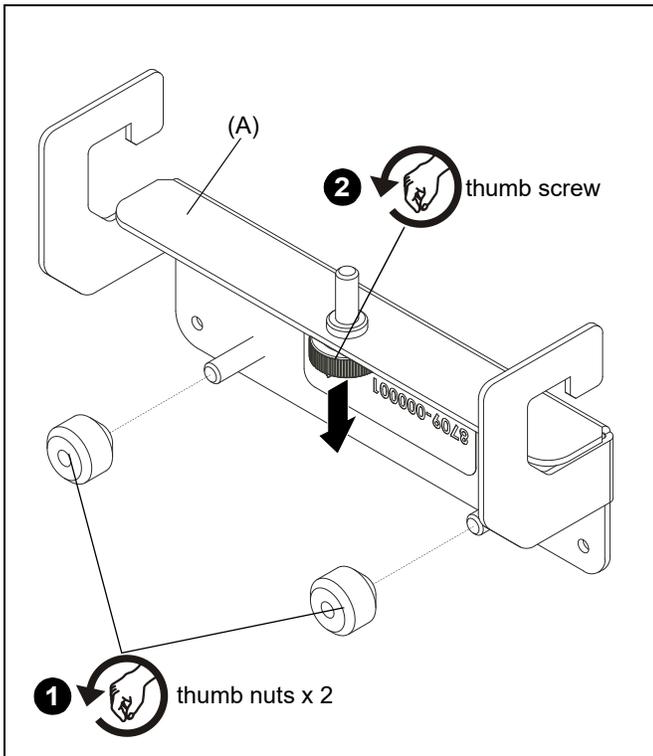


Figure 1

2. Loosen thumb screw until it is almost completely lowered. (See Figure 2)
3. Use removed thumb nuts to attach flex kit (sold separately) to flex kit bracket (A). (See Figure 2)

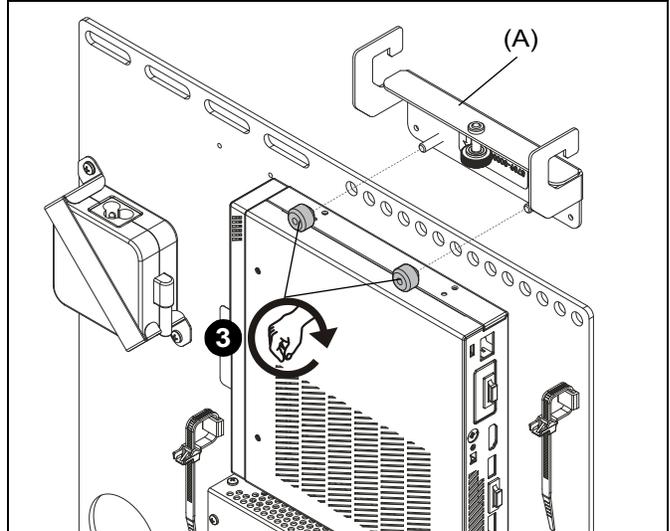


Figure 2



WARNING: Exceeding the weight capacity can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the combined weight of all components attached to the AS3A102 accessory does not exceed 8 lbs (36 kg).

4. Hang flex hook bracket onto top rail of AS3LD mounting system. (See Figure 3)
5. Tighten thumb screw until bracket is securely installed onto rail. (See Figure 3)

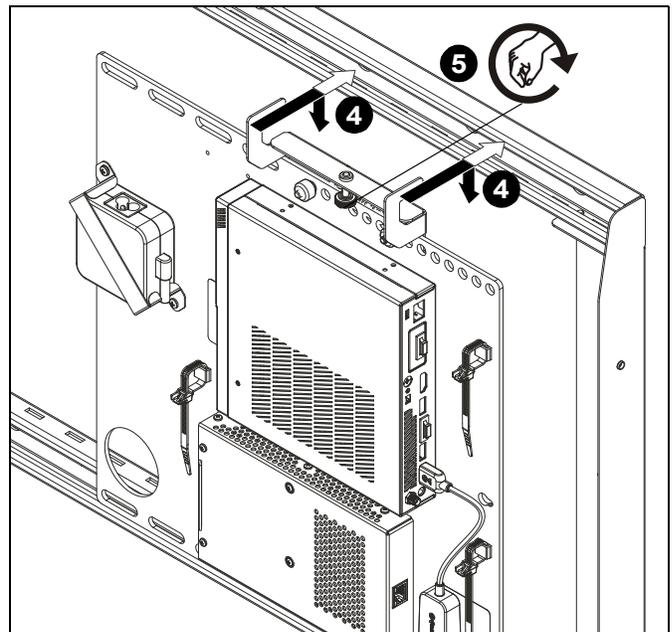


Figure 3

CHIEF®

A brand of  **legrand®**

8800-003398 Rev00
©2023 Legrand | AV
www.legrandav.com
10/2023

USA/International	A 6436 City West Parkway, Eden Prairie, MN 55344 P 800.582.6480 / 952.225.6000 F 877.894.6918 / 952.894.6918
Europe	A Franklinstraat 14, 6003 DK Weert, Netherlands P +31 (0) 495 580 852 F +31 (0) 495 580 845
Asia Pacific	A Office No. 918 on 9/F, Shatin Galleria 18-24 Shan Mei Street Fotan, Shatin, Hong Kong P 852 2145 4099 F 852 2145 4477

