



**APC SRTL5KRM2UI-HW uninterruptible power supply (UPS)
Double-conversion (Online) 5 kVA 5000 W**

Brand : APC

Product code: SRTL5KRM2UI-HW

Product name : SRTL5KRM2UI-HW

- Ultra-high power density, On-Line power protection with Lithium-ion batteries and scalable runtime options
- Includes: 2P-3P connector, Earth terminal block, Front cover, Rail extension, Stabilization feet, Temperature sensor, USB cable
- 5000VA, Lithium-ion, Rack/Tower 2U, 230V, Hardwired 3-Wire Output, Network Card


APC SRTL5KRM2UI-HW uninterruptible power supply (UPS) Double-conversion (Online) 5 kVA 5000 W:

APC Smart-UPS Ultra On-Line, 5000VA, Lithium-ion, Rack/Tower 2U, 230V, Hardwired 3-Wire Output, Network Card, Extended runtime, W/rail kit

APC Smart-UPS Ultra On-Line, 5000VA, Lithium-ion, Rack/Tower 2U, 230V, Hardwired 3-Wire Output, Network Card, Extended runtime, W/rail kit
Ultra-high power density, On-Line power protection with Lithium-ion batteries and scalable runtime options
Includes: 2P-3P connector, Earth terminal block, Front cover, Rail extension, Stabilization feet, Temperature sensor, USB cable



Features		Design	
UPS topology *	Double-conversion (Online)	International Protection (IP) code	IP20
Output power capacity *	5 kVA	Operational conditions	
Output power *	5000 W	Operating temperature (T-T)	0 - 40 °C
Waveform *	Sine	Storage temperature (T-T)	-15 - 45 °C
Input operation voltage (min) *	180 V	Operating relative humidity (H-H)	0 - 95%
Input operation voltage (max) *	275 V	Storage relative humidity (H-H)	0 - 95%
Input frequency *	40 - 70 Hz	Operating altitude	0 - 3048 m
Output operation voltage (max)	220 V	Non-operating altitude	0 - 15240 m
Heat dissipation	931 BTU/h	Technical details	
Noise level	55 dB	Warranty period	5 year(s)
Battery		Compliance certificates	CE, UKCA
Battery technology	Lithium-Ion (Li-Ion)	Weight & dimensions	
Battery voltage	180 V	Width	432 mm
Design		Depth	701 mm
Form factor *	Rackmount	Height	86 mm
Rack capacity	2U	Weight	29.2 kg
Product colour *	Grey	Package width	585 mm
		Package depth	984 mm
		Package height	392 mm
		Package weight	38.5 kg

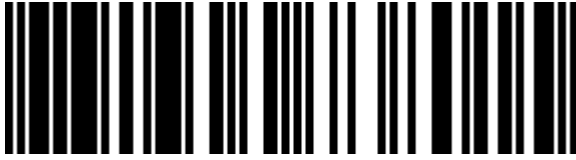

0731304738015



731304738015

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 02-AUG-2024. Prints or copies of Information are only valid on the printed Publication date