



**APC RACK PDU BASIC 1 U 16A 230V power distribution unit (PDU)  
12 AC outlet(s) 0U/1U Black**

**Brand :** APC

**Product code:** AP9559

**Product name :** RACK PDU BASIC 1 U 16A 230V

Rack PDU,Basic, 1U, 16A,208&230V, (10)C13 & (2)C19

[APC RACK PDU BASIC 1 U 16A 230V power distribution unit \(PDU\) 12 AC outlet\(s\) 0U/1U Black:](#)

Description:

APC Basic Rack PDU, Input : 120, 208, 230V , Input Connection Type : IEC-320 C20 , Cord Length : 8.2 feet ( 2.5 meters ) , Output : 120, 208, 230V , Output Connections : (10)IEC 320 C13, (2)IEC 320 C19

Features: 19 inch Rack-Mountable, Low Cost Power Distribution, Vertical Mounting Capabilities

Includes: Cord Retention Clips, Rack Mounting Brackets, User Manual

Output Voltage(s) (main only) - 120, 208, 230 V

Maximum Total Current Draw per Phase - 16 A

Output Connections - (10)IEC 320 C13; (2)IEC 320 C19

Always on Outlets - 12  
Overload Protection

Input:

Nominal input voltage - 120, 208, 230

Input frequency (Hz) - 50/60 Hz

Input Connection Type - IEC-320 C20

Cord Length 8.2 feet ( 2.5 meters )

Acceptable Input Voltage - 90-250 VAC


Maximum Line Current per phase - 16.0 A

Maximum Input Current per phase - 16.0 A

Load Capacity - 3680

| Design                |                                                                                          | Power                             |                      |
|-----------------------|------------------------------------------------------------------------------------------|-----------------------------------|----------------------|
| PDU types *           | Basic                                                                                    | Load capacity                     | 3680 VA              |
| Type                  | Single-phase                                                                             | Maximum input current per phase   | 16 A                 |
| Rack capacity *       | 0U/1U                                                                                    | Maximum power                     | 3680 W               |
| Mounting              | Horizontal/Vertical                                                                      | Weight & dimensions               |                      |
| Product colour        | Black                                                                                    | Dimensions (WxDxH)                | 447 x 57.2 x 44.5 mm |
| Ports & interfaces    |                                                                                          | Weight                            | 980 g                |
| AC outlets quantity * | 12 AC outlet(s)                                                                          | Operational conditions            |                      |
| Power plug            | C20 coupler                                                                              | Operating temperature (T-T)       | 0 - 45 °C            |
| AC outlet types *     | C13 coupler, C19 coupler                                                                 | Storage temperature (T-T)         | -25 - 65 °C          |
| I/O ports             | Output Connections - (10)IEC 320 C13; (2)IEC 320 C19 Input Connection Type - IEC-320 C20 | Operating relative humidity (H-H) | 0 - 95%              |
|                       |                                                                                          | Storage relative humidity (H-H)   | 0 - 95%              |
| Features              |                                                                                          |                                   |                      |
| Cable length          | 2.5 m                                                                                    |                                   |                      |



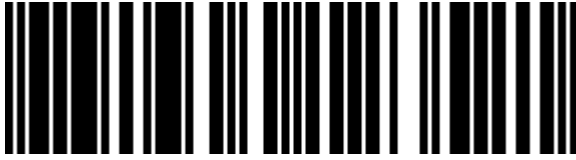

0731304123521



731304123521

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.