

USB-C Travel Dock with Power Pass-Through

UH3238

Designed and made to be a portable and versatile connectivity solution, the UH3238 USB-C Travel Dock with Power Pass-Through contains 5 essential ports — one audio port, two USB Type-A ports, one HDMI port, and one USB-C DC in port — to provide connectivity and power supply for users that travel and require mobile office scenarios. The Thunderbolt™ 3 and USB 3.2 Gen 1- compatible interface guarantees superior data transmission speed up to 5 Gbps. With the support for up to 4K HDMI (3840 x 2160 @ 60Hz), the device allows users to multitask at stunningly realistic UHD resolution. The UH3238 boasts a plug-and-play design and is compatible with all major operating systems (Windows®, macOS X, iPadOS, and Android). Weighing at just 44g, it is a compact, yet competent, and ideal data and power transmission solution for every mobile workstation ecosystem.














Features

- 5-in-1 travel dock that includes one audio port, two USB Type-A ports, one HDMI port, and one USB-C DC
- Supports USB PD 3.0 for charging up to 92W via USB-C PD power adapter power profiles include 5V, 9V, 15V, 20V
- Supports DP 1.4 Alt mode with up to 4K (3840 x 2160) @ 60Hz for superior video output
- HDMI (3D, Deep Color, 4K); HDCP 2.2 compliant
- Plug and Play no drivers needed
- Works with all major operating systems: Windows®, macOS X, iPad Pro (USB-C), and Android
- Compatible with Thunderbolt™ 3 (USB-C)
- Compact, lightweight design for mobile workstation



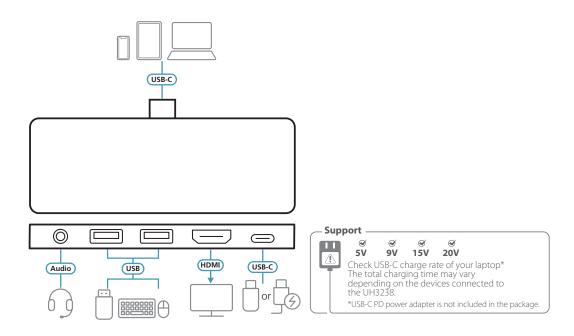

Specifications

| | UH3238 |
|-----------------------------|---|
| Computer Connections | 1 |
| Connectors | |
| Computer | USB 3.2 Gen 1 Type-C |
| Device | 1 x USB 3.2 Gen 1 Type-A female supports BC 1.2 (Max. output 5V, 7.5W)* 1 x USB 3.2 Gen 1 Type-A female (Max. output 5V, 4.5W)* 1 x USB 3.2 Gen 1 Type-C female (Max. output 5V, 12.5W)* |
| | *a. 2 x USB-A ports share total 5V, 9W when UH3238 is powered by external USB-C PD power adapter *b. 2 x USB-A and 1 x USB-C ports share total 5V, 7.5W when UH3238 is powered by iPad via USB-C *c. 2 x USB-A and 1 x USB-C ports share total 5V, 12.5W when UH3238 is powered by PC via USB-C (@5V, 3A bus-powered) |
| Video Output | 1 x HDMI Female (Black) |
| Audio | 1 x 3.5mm stereo 4-pole microphone and headphone jack |
| Power | 1 x USB-C Female (supports USB 3.2 Gen 1 data transfer)* |
| | *Supports PD 3.0 for laptop charging up to 92W. Power profiles include 5V, 9V, 15V, 20V (additional USB-C PD power adapter needed) |
| Video Resolution | 3840 x 2160 @ 60 Hz* |
| | *To get max. bandwidth, upstream should support standard DP1.4 Alt mode with DSC3:1 and HBR3. When connecting a DP1.2 Alt mode supported upstream, the max. resolution of HDMI is 4K @ 30 Hz due to bandwidth limitation |
| Power Consumption | 5V, 8W |
| System Requirements | Windows® 10 or later, USB-C enabled computer with DP Alt Mode* |
| | *With Intel 7th-Generation Core Processor (Kaby-Lake) and above. More info about CPU generation, please find: https://www.intel.com/content/www/us/en/processors/processor-numbers.html |
| | macOS X 10.12 or later, USB-C enabled computer |
| | iPadOS 13.1 or later, iPad Pro (USB-C) |
| | Android 8.0 or later, USB-C enabled Smartphone with DP Alt Mode |
| Environmental | |
| Operating Temperature | 0 – 40 °C |
| Storage Temperature | -20 – 60 °C |
| Humidity | 0 – 80 % RH, Non-condensing |
| Physical Properties | |
| Housing | Aluminum |
| Weight | 44 g |
| Dimensions (L x W x H) | 9.00 x 3.20 x 0.82 cm |

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datung Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767 www.aten.com E-mail: marketing@aten.com

Product information is subject to change without prior notice.

Released: 03/2022 V3.0

© Copyright 2022 ATEN® International Co. Ltd.
ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.
The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are
trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

