

The hydraulic two post lift from Bradmac is the perfect fixed lift solution for light commercial vehicles, and is ideal for long wheel base vans. A two post lift differs from mobile vehicle lifts and four post lifts as it lifts from the chassis of the vehicle. Lifting from the chassis gives you access not only to the underside of the vehicle but also to the wheel and associated operations without the need for support stands.

### FEATURES

- Electrohydraulic operation
- Lift without baseframe
- Operated by powerful hydraulic unit
- Bend-proof overhead connection between columns
- Integrated safety stop via switch bar
- Automatic synchronization via steel cables
- Automatic arm restraint with additional manual disengagement
- Lifting and lowering via push button control
- Adjustable width and/or height on initial set up
- 240v socket on master column



### TECHNICAL DATA

Model	PRO-2-45	PRO-2-55	PRO-2-65	PRO-2-80
Lifting Capacity	4,500kg	5,500kg	6,500kg	8,000kg
Lifting Height	1890mm	1895mm	1895mm	1920mm
Overall Height	4262mm	4915mm	4915mm	5200mm
Overall Height to safety stop	4064mm	4670mm	4670mm	4958mm
Total Width	3600mm	3992mm	3992mm	3700mm
Drive through width	2770mm	3330mm	3330mm	3040mm
Length Front Arm	640/1145mm	900/1820mm	900/1820mm	1160/2000mm
Length Rear Arm	880/1560mm	900/1820mm	900/1820mm	1160/2000mm
Adapter Height	95mm	115mm	115mm	130mm
Electrical Connection	230/400V - 50Hz	230/400V - 50Hz	230/400V - 50Hz	230/400V - 50Hz
Motor	3kW	3kW	3kW	3kW
Time of full rise approx.	32 seconds	65 seconds	65 seconds	65 seconds
Adjustment	250mm lower	250mm lower	250mm lower	-
Lifting Arm Configuration	Asymmetric	Symmetric	Symmetric	Symmetric


The hydraulic two post lift from Bradmac is the perfect fixed lift solution for light commercial vehicles, and is ideal for long wheel base vans. A two post lift differs from mobile vehicle lifts and four post lifts as it lifts from the chassis of the vehicle. Lifting from the chassis gives you access not only to the underside of the vehicle but also to the wheel and associated operations without the need for support stands.

### FEATURES


- Electrohydraulic operation
- Lift without baseframe
- Operated by powerful hydraulic unit
- Bend-proof overhead connection between columns
- Integrated safety stop via switch bar
- Automatic synchronization via steel cables
- Automatic arm restraint with additional manual disengagement
- Lifting and lowering via push button control
- Adjustable width and/or height on initial set up
- 240v socket on master column




### TECHNICAL DATA

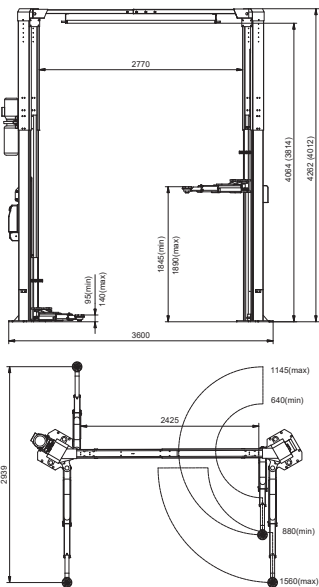


**PRO-2-45**

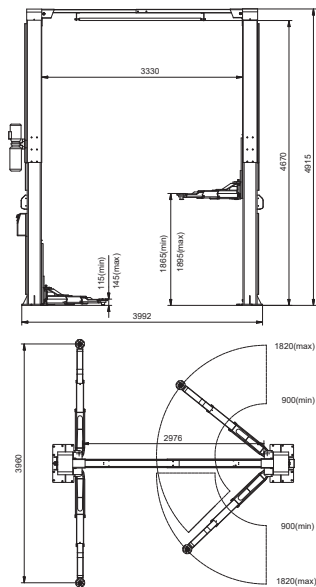

**PRO-2-55**

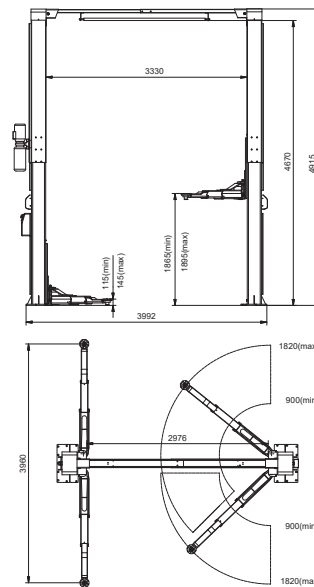

**PRO-2-65**

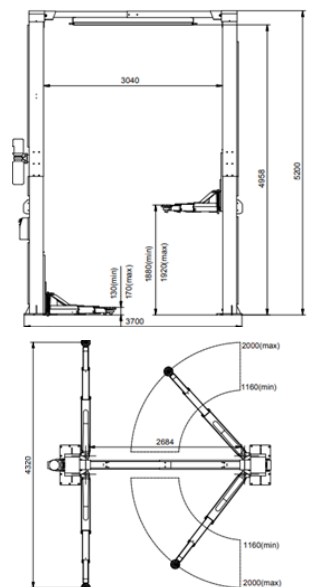

**PRO-2-80**