



TA-CUB Series

Desktop Connectivity Box — USB-A/C 30W

Product Spec Sheet · Recessed Desktop Power & USB-C/A Fast-Charge Outlet

FEATURING

TA-CUB601 TA-CUB Series Desktop Connectivity Box — USB-A/C 30W

TA-CUB Series Desktop Connectivity Box — USB-A/C 30W

DESKTOP CONNECTIVITY BOX — USB-A/C 30W

P/N: TA-CUB601



A compact single-gang desktop connectivity box for huddle rooms and personal workstations. TA-CUB601 recesses flush into the tabletop and combines one universal power outlet with a combo USB-A/USB-C fast-charge port and four cable pass-through holes, keeping laptops and phones powered without cluttering the desk with adapters.

KEY FEATURES

- 1 × universal power outlet (110-220V, multi-standard compatibility)
- 1 × combo USB-A + USB-C charging port — QC 3.0 and PD fast charging, 30W max total output
- 4 × cable pass-through holes for HDMI, network and other cabling (no cables included)
- Compact recessed tabletop design that sits flush when closed
- Sandblasted anodized aluminum alloy housing in black
- Integrated cable management for a clean, organized desktop
- Blank cover plates included for any unused pass-through holes

Technical Specifications

Standard Configuration	1× Universal power; 1× USB-A + USB-C combo charging port (QC 3.0 / PD, 30W max total); 4× cable pass-through holes
Charging Output	USB-A + USB-C combo, 30W max combined (QC 3.0 / PD fast-charge)
Power Rating	110-220V, 50/60Hz, 10A (universal socket)
Color	Black
Material	Aluminum alloy
Surface Treatment	Sandblasted anodized finish
Top Plate Size	207 × 125mm (R8 rounded corners) — see diagram
Recommended Panel Cutout	185 × 107mm — see diagram
Housing Depth	104mm below deck — see diagram
Product Weight	Not specified by manufacturer
Shipping Weight	Not specified by manufacturer
Shipping Dimensions (L×W×H)	Not specified by manufacturer


Installed View & Dimensions

TOP PANEL (INSTALLED VIEW)



Recessed top panel as installed in a wood tabletop, showing the outlet layout and cable pass-through holes described above.

CUTOUT & HOUSING DIMENSIONS

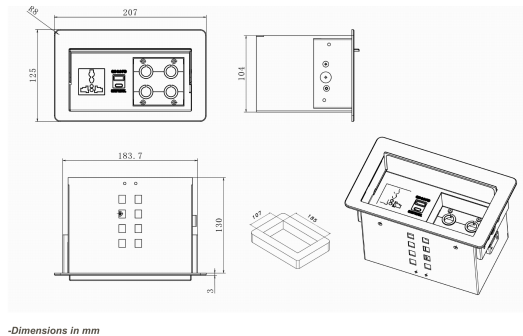

-Dimensions in mm

Top plate 207 × 125mm (R8 corners); recommended panel cutout 185 × 107mm; housing depth 104mm.

TYPICAL DEPLOYMENT

Mount recessed into a conference table, credenza or workstation desktop using the cutout dimensions above. The hinged panel sits flush when closed, and the pass-through holes route cables from equipment below the table without a separate grommet.