
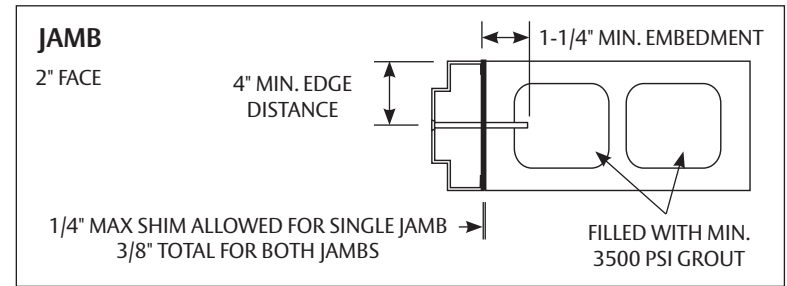
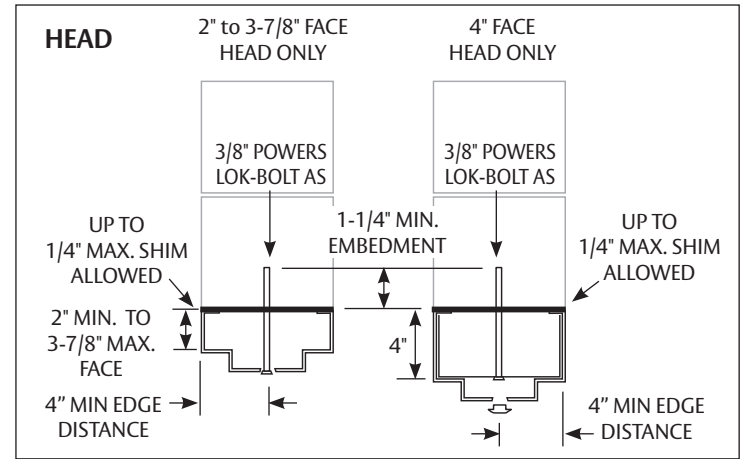


StormPro 361 Assembly Anchoring - Single

Head Anchoring Method – Welded Pipe Spacer with 3/8" Powers Lok Bolt AS

Jamb Anchoring Method – Welded Pipe Spacer with 3/8" Powers Lok Bolt AS

Design Pressure +/- 284 psf

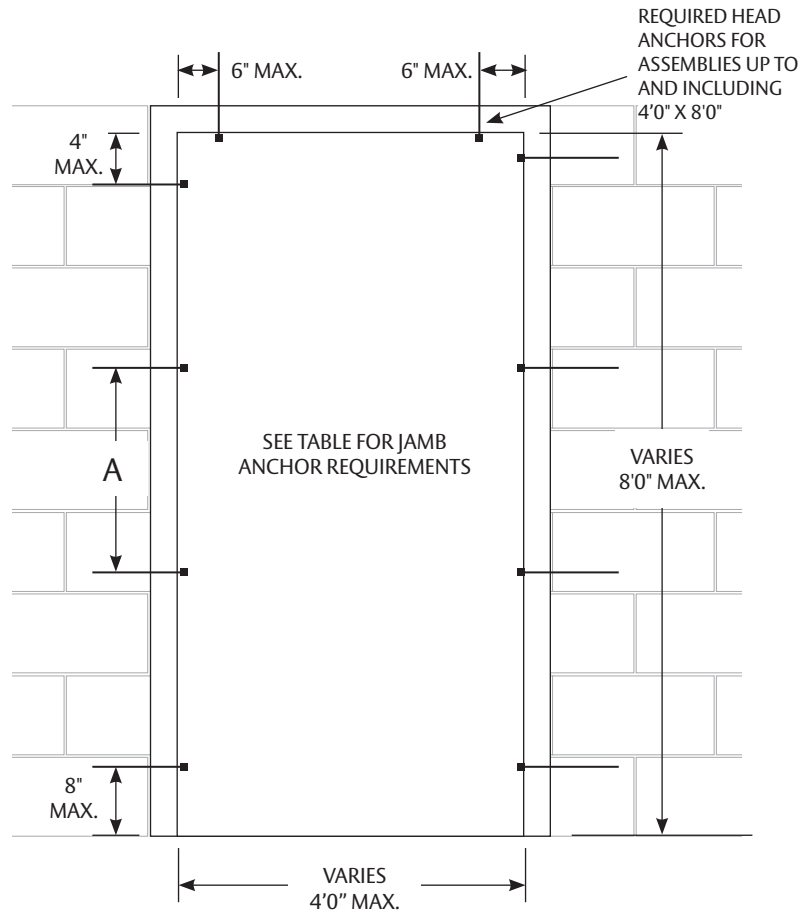

OPENING SIZE	"A" DIMENSION
UP TO AND INCLUDING 3070	21" MAX. ON CENTER
OVER 3070 AND UP TO AND INCLUDING 4080	18" MAX. ON CENTER

Jamb anchor locations may vary provided that the spacing on either side of each jamb anchor does not exceed dimension "A" in table above, distance from bottom corners does not exceed 8", and distance from top corners does not exceed 4". Head anchors shall be provided as shown. Anchors may have up to 1/4" maximum load bearing shim.

Signed and sealed anchor calculations available upon request.




<p>Experience a safer and more open world</p>	JOB NO.	PROJECT	SHEET NO. OF
		LOCATION	

StormPro 361 Assembly Anchoring - Single

Head Anchoring Method – Welded to the Building Structure

Jamb Anchoring Method – Welded Pipe Spacer with 3/8" Powers Lok Bolt AS

Design Pressure +/- 284 psf

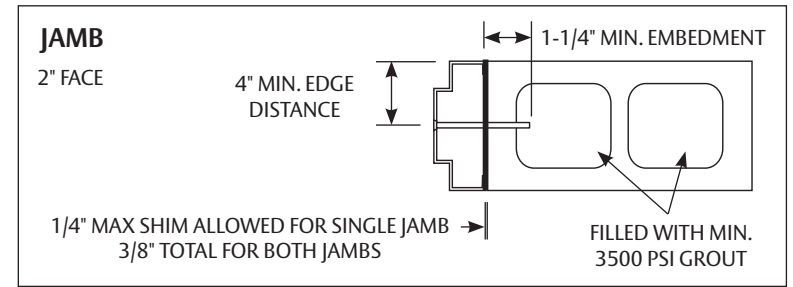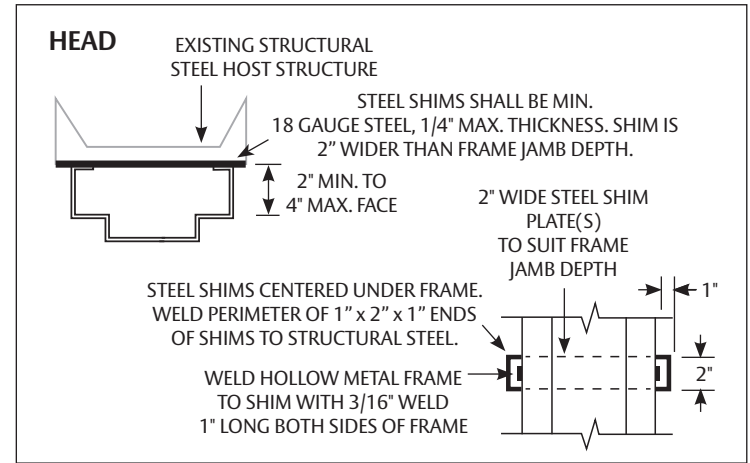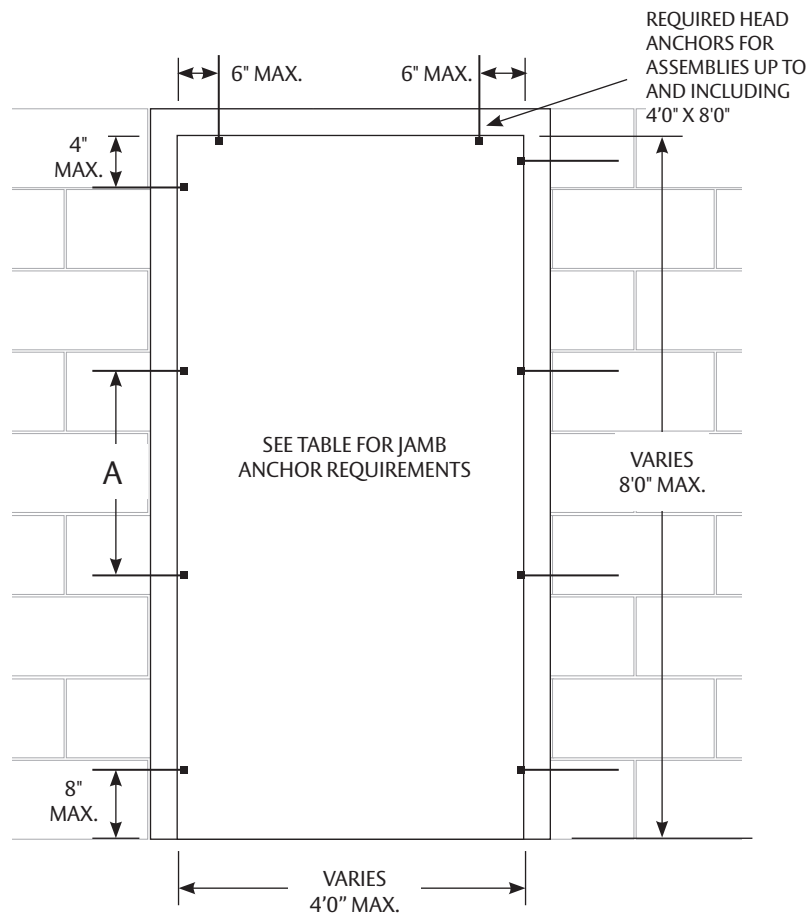

OPENING SIZE	"A" DIMENSION
UP TO AND INCLUDING 3070	21" MAX. ON CENTER
OVER 3070 AND UP TO AND INCLUDING 4080	18" MAX. ON CENTER

Jamb anchor locations may vary provided that the spacing on either side of each jamb anchor does not exceed dimension "A" in table above, distance from bottom corners does not exceed 8", and distance from top corners does not exceed 4". Head anchors shall be provided as shown. Anchors may have up to 1/4" maximum load bearing shim.

Signed and sealed anchor calculations available upon request.




<p>Experience a safer and more open world</p>	JOB NO.	PROJECT	SHEET NO. OF
		LOCATION	

StormPro 361 Assembly Anchoring - Single

Head Anchoring Method – Welded Pipe Spacer with 3/8" Powers Lok Bolt AS

Jamb Anchoring Method – Masonry Wire Anchors

Design Pressure +/- 284 psf

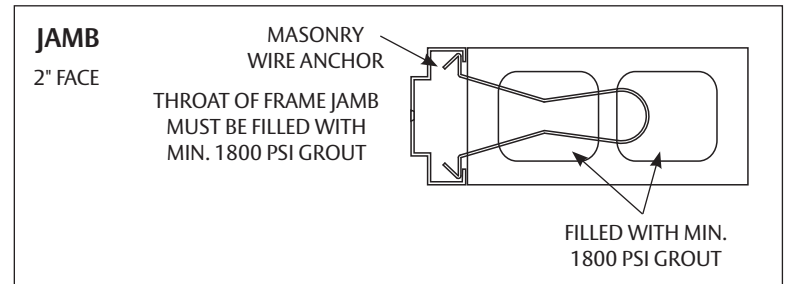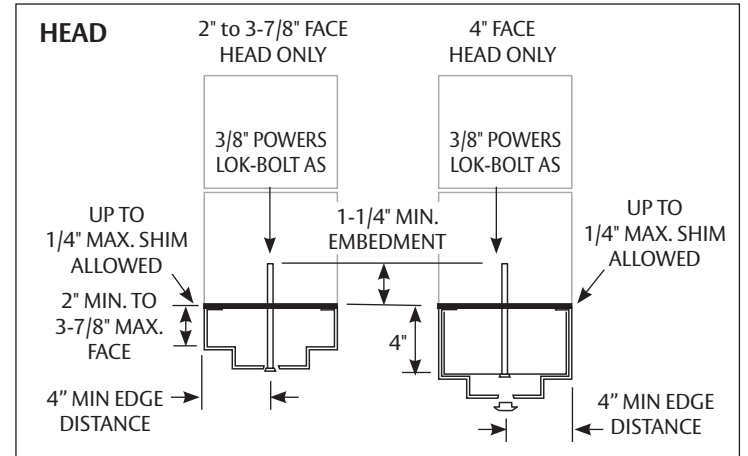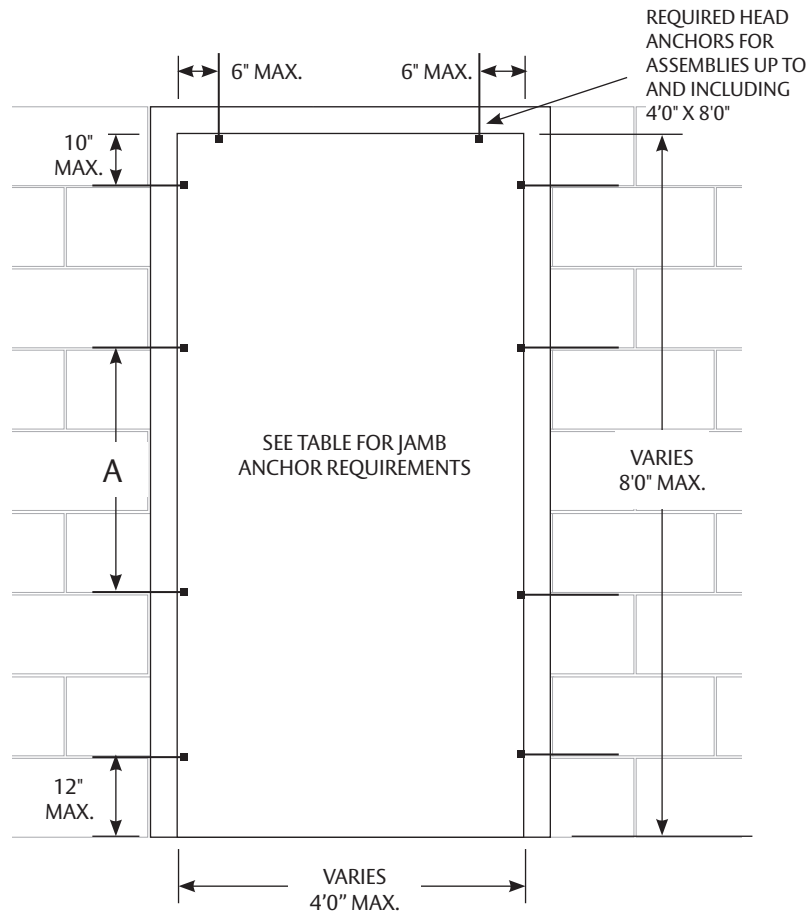

OPENING SIZE	"A" DIMENSION
UP TO AND INCLUDING 3070	18" MAX. ON CENTER
OVER 3070 AND UP TO AND INCLUDING 4080	12" MAX. ON CENTER

Jamb anchor locations may vary provided that the spacing on either side of each jamb anchor does not exceed dimension "A" in table above, distance from bottom corners does not exceed 12", and distance from top corners does not exceed 10". Head anchors shall be provided as shown. Anchors may have up to 1/4" maximum load bearing shim.

Signed and sealed anchor calculations available upon request.




 ASSA ABLOY Experience a safer and more open world	JOB NO.	PROJECT	SHEET NO. OF
		LOCATION	

StormPro 361 Assembly Anchoring - Single

Head Anchoring Method – Welded to the Building Structure

Jamb Anchoring Method – Masonry Wire Anchors

Design Pressure +/- 284 psf

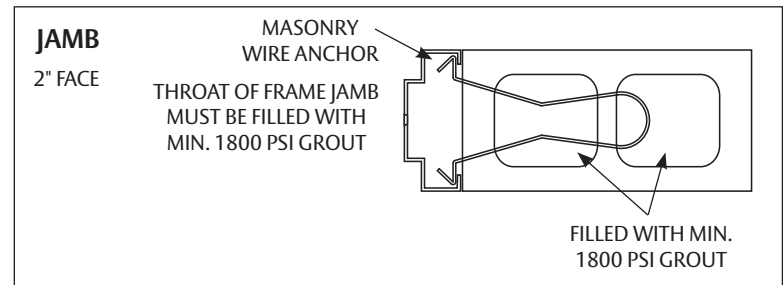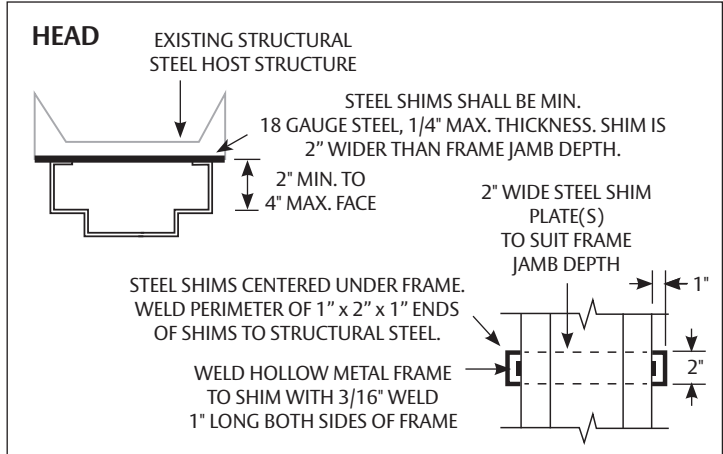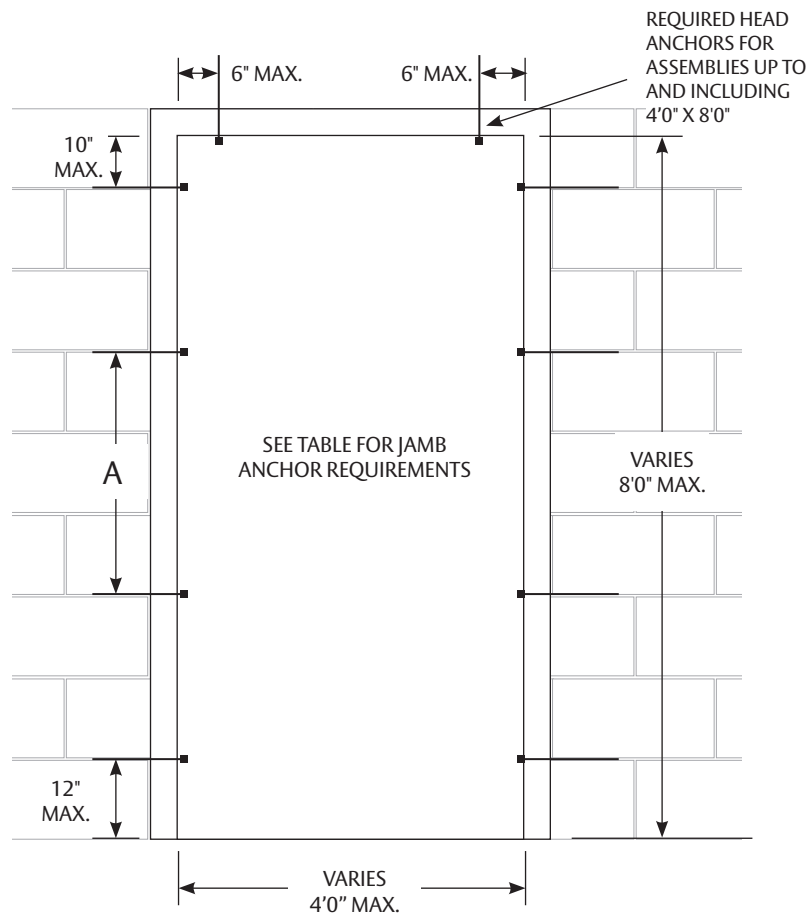

OPENING SIZE	"A" DIMENSION
UP TO AND INCLUDING 3070	18" MAX. ON CENTER
OVER 3070 AND UP TO AND INCLUDING 4080	12" MAX. ON CENTER

Jamb anchor locations may vary provided that the spacing on either side of each jamb anchor does not exceed dimension "A" in table above, distance from bottom corners does not exceed 12", and distance from top corners does not exceed 10". Head anchors shall be provided as shown. Anchors may have up to 1/4" maximum load bearing shim.

Signed and sealed anchor calculations available upon request.


<p>Experience a safer and more open world</p>	JOB NO.	PROJECT	SHEET NO. OF
		LOCATION	

StormPro 361 Assembly Anchoring - Single


Head Anchoring Method – Welded to the Building Structure

Jamb Anchoring Method – Welded to the Building Structure

Design Pressure +/- 284 psf

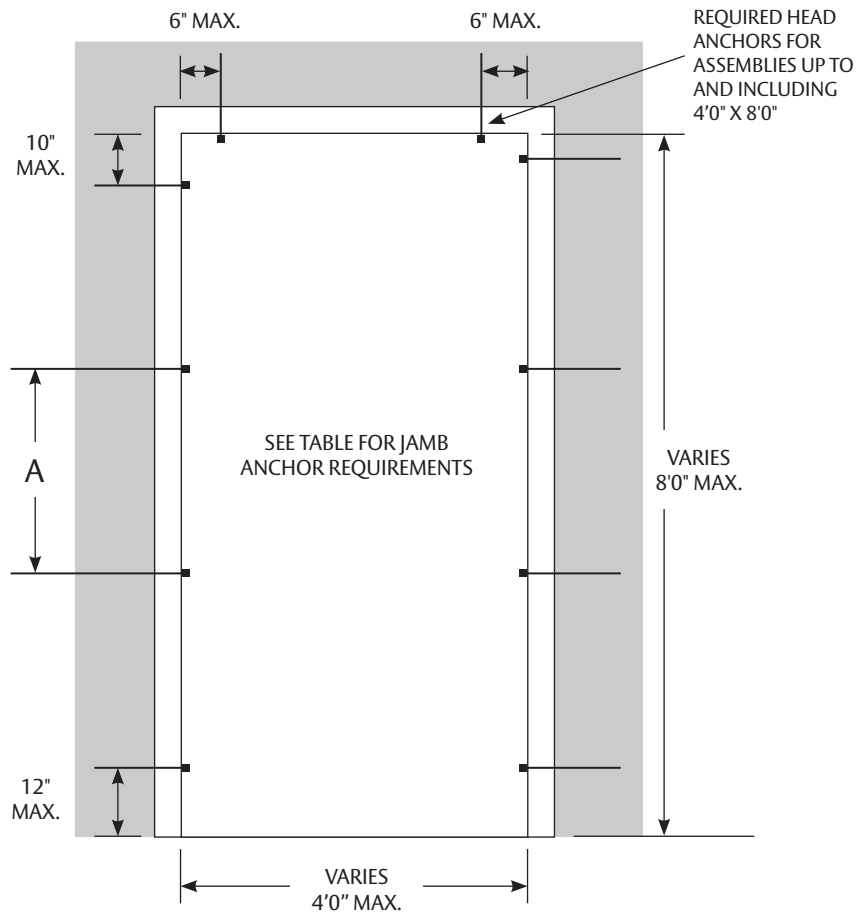

HEAD and JAMB

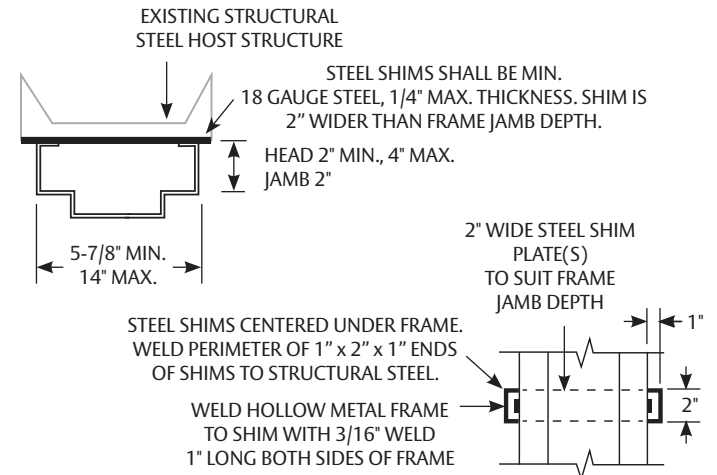

OPENING SIZE	"A" DIMENSION
UP TO AND INCLUDING 3070	24" MAX. ON CENTER
OVER 3070 AND UP TO AND INCLUDING 4080	24" MAX. ON CENTER

Jamb anchor locations may vary provided that the spacing on either side of each jamb anchor does not exceed dimension "A" in table above, distance from bottom corners does not exceed 12", and distance from top corners does not exceed 10". Head anchors shall be provided as shown. Anchors may have up to 1/4" maximum load bearing shim.

Signed and sealed anchor calculations available upon request.



ASSA ABLOY

Experience a safer and more open world

JOB NO.

PROJECT

SHEET NO. OF




LOCATION

StormPro 361 Assembly Anchoring - Single

Head Anchoring Method – Welded Pipe Spacer with 3/8" Powers Lok Bolt AS

Jamb Anchoring Method – (2) 16 Ga. Masonry T Anchors Welded Together

Design Pressure +/- 284 psf

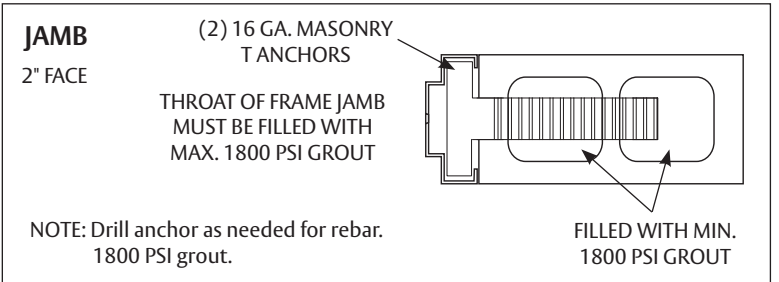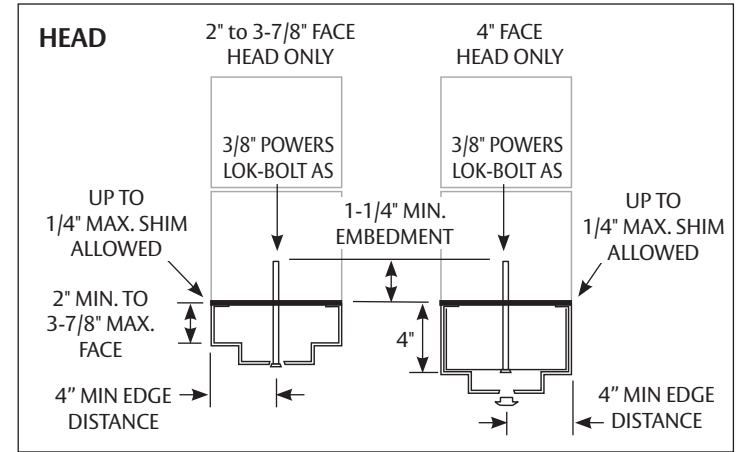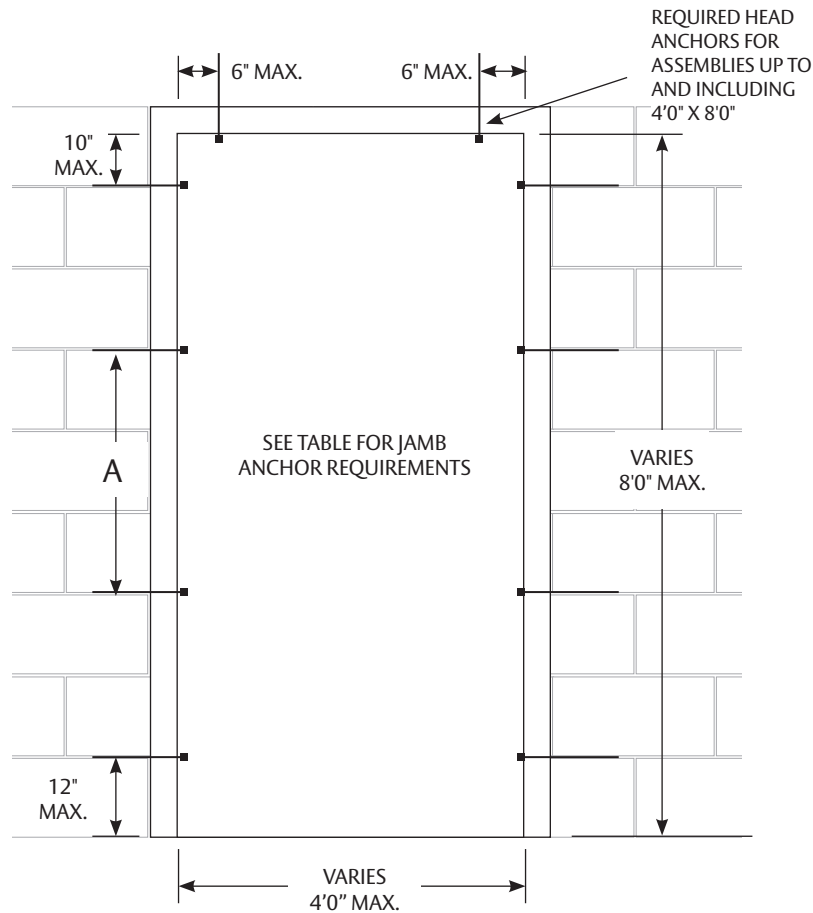

OPENING SIZE	"A" DIMENSION
UP TO AND INCLUDING 3070	24" MAX. ON CENTER
OVER 3070 AND UP TO AND INCLUDING 4080	22" MAX. ON CENTER

Jamb anchor locations may vary provided that the spacing on either side of each jamb anchor does not exceed dimension "A" in table above, distance from bottom corners does not exceed 12", and distance from top corners does not exceed 10". Head anchors shall be provided as shown. Anchors may have up to 1/4" maximum load bearing shim.

Signed and sealed anchor calculations available upon request.



JOB NO.

PROJECT

SHEET NO. OF




LOCATION

StormPro 361 Assembly Anchoring - Single

Head Anchoring Method – Welded to the Building Structure

Jamb Anchoring Method – (2) 16 Ga. Masonry T Anchors Welded Together

Design Pressure +/- 284 psf

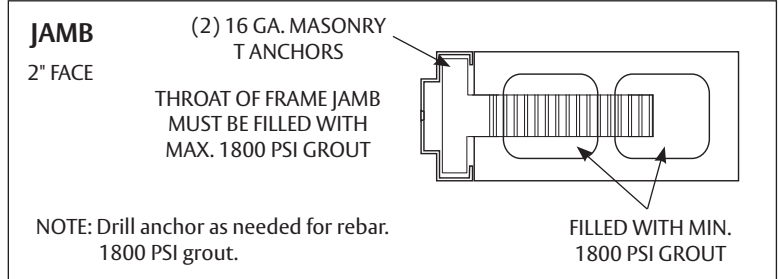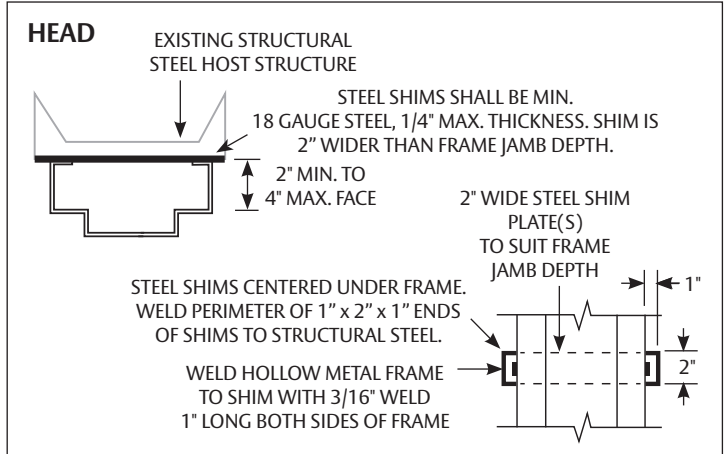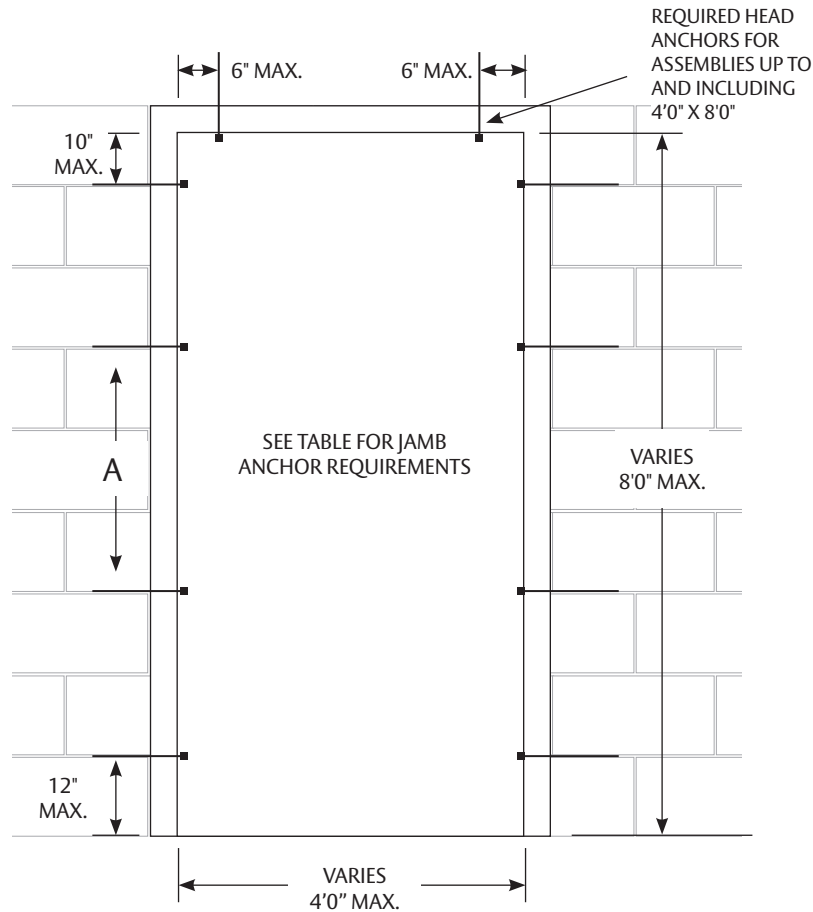

OPENING SIZE	"A" DIMENSION
UP TO AND INCLUDING 3070	24" MAX. ON CENTER
OVER 3070 AND UP TO AND INCLUDING 4080	22" MAX. ON CENTER

Jamb anchor locations may vary provided that the spacing on either side of each jamb anchor does not exceed dimension "A" in table above, distance from bottom corners does not exceed 8", and distance from top corners does not exceed 6". Head anchors shall be provided as shown. Anchors may have up to 1/4" maximum load bearing shim.

Signed and sealed anchor calculations available upon request.




<p>Experience a safer and more open world</p>	JOB NO.	PROJECT	SHEET NO. OF
		LOCATION	

StormPro 361 Assembly Anchoring - Single

Head Anchoring Method – Welded Pipe Spacer with 3/8" Powers Lok Bolt AS

Jamb Anchoring Method – 12 Ga. Masonry T Anchors

Design Pressure +/- 284 psf

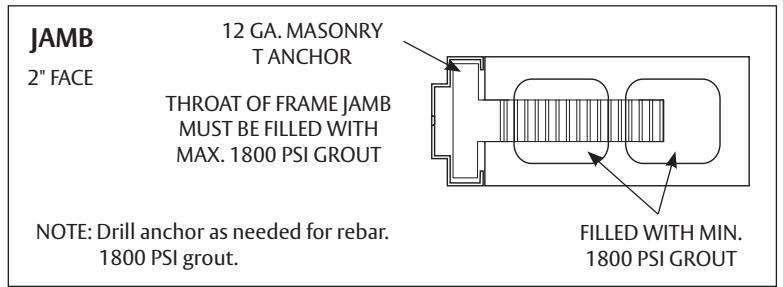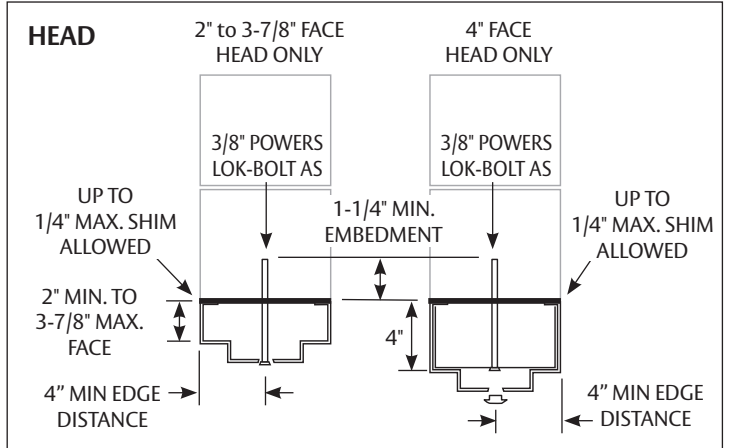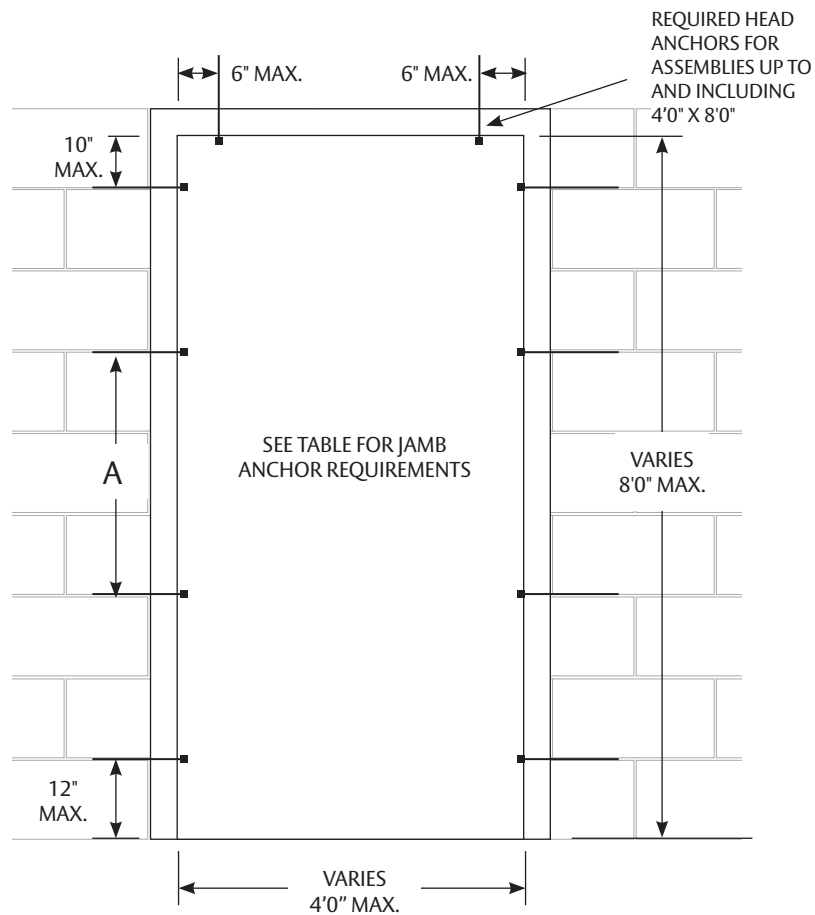

OPENING SIZE	"A" DIMENSION
UP TO AND INCLUDING 3070	24" MAX. ON CENTER
OVER 3070 AND UP TO AND INCLUDING 4080	24" MAX. ON CENTER

Jamb anchor locations may vary provided that the spacing on either side of each jamb anchor does not exceed dimension "A" in table above, distance from bottom corners does not exceed 12", and distance from top corners does not exceed 10". Head anchors shall be provided as shown. Anchors may have up to 1/4" maximum load bearing shim.

Signed and sealed anchor calculations available upon request.




 ASSA ABLOY Experience a safer and more open world	JOB NO.	PROJECT	SHEET NO. OF
		LOCATION	

StormPro 361 Assembly Anchoring - Single

Head Anchoring Method – Welded to the Building Structure

Jamb Anchoring Method – 12 Ga. Masonry T Anchors

Design Pressure +/- 284 psf

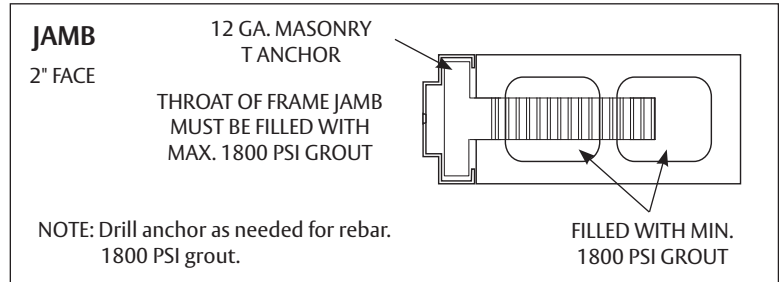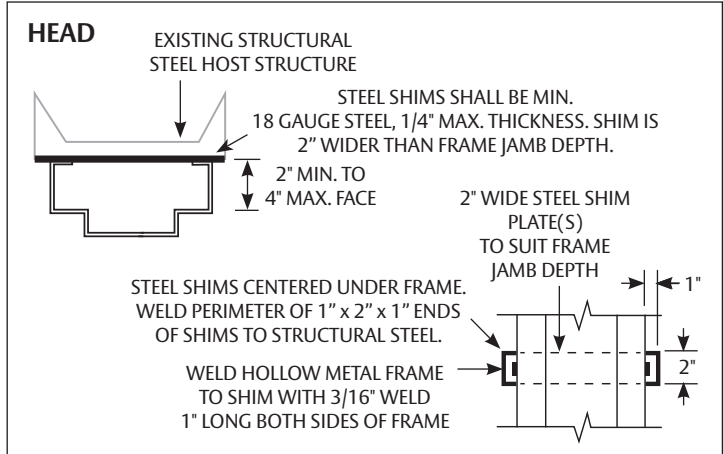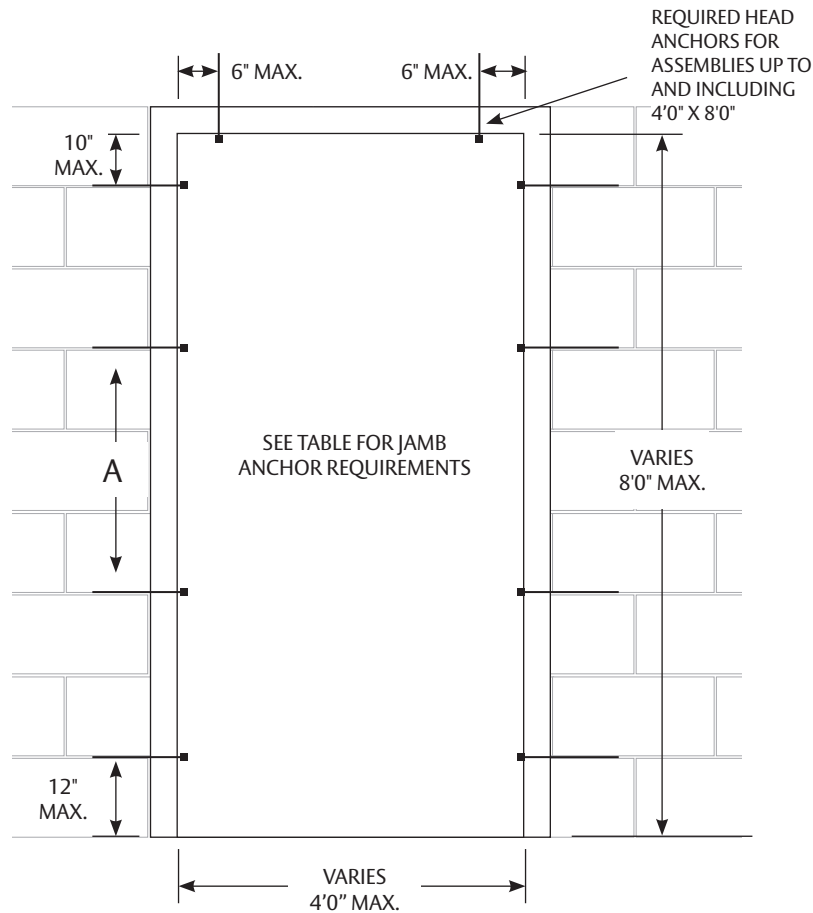

OPENING SIZE	"A" DIMENSION
UP TO AND INCLUDING 3070	24" MAX. ON CENTER
OVER 3070 AND UP TO AND INCLUDING 4080	24" MAX. ON CENTER

Jamb anchor locations may vary provided that the spacing on either side of each jamb anchor does not exceed dimension "A" in table above, distance from bottom corners does not exceed 8", and distance from top corners does not exceed 6". Head anchors shall be provided as shown. Anchors may have up to 1/4" maximum load bearing shim.

Signed and sealed anchor calculations available upon request.

<p>Experience a safer and more open world</p>	JOB NO.	PROJECT	SHEET NO. OF
		LOCATION	