

rebel 1100




TIMELESS
ALL DAY





REBEL 1100

ULTIMATE CRUISER

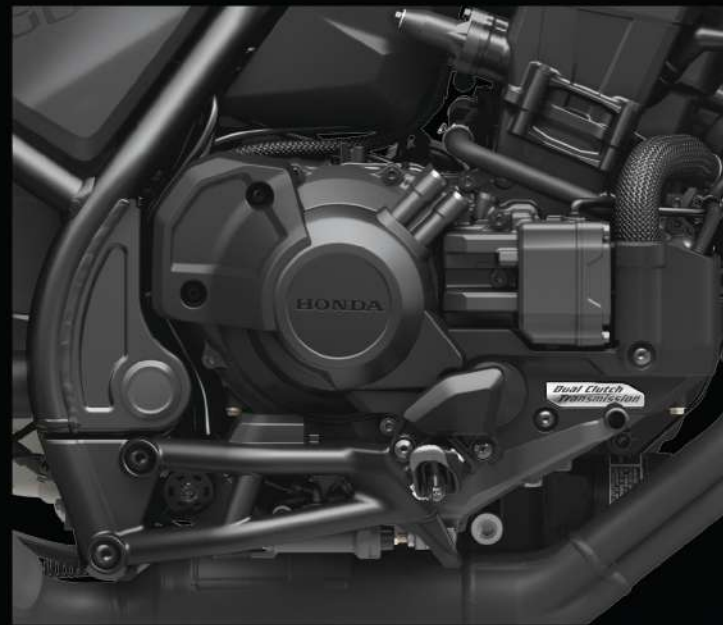

1100^{cc} SOHC
PARALLEL TWIN - CYLINDER ENGINE
DUAL CLUTCH TRANSMISSION
8-VALVE, THROTTLE BY WIRE AND CRUISE CONTROL



FULL DIGITAL PANEL METER
Honda SELECTABLE TORQUE CONTROL,
3 DEFAULT RIDING MODES



ALL LED LIGHTING SYSTEM



ADJUSTABLE 43MM TELESCOPIC
FRONT SUSPENSION



ADJUSTABLE TWIN PIGGYBACK
REAR SHOCK

COLOR VARIANT



GUNMETAL BLACK METALLIC

SPECIFICATIONS

DIMENSION

Dimension 2,240 x 834 x 1,115 mm | **Wheel Base** 1,520 mm | **Ground Clearance** 120 mm | **Seat Height** 700 mm | **Curb Mass** 233 kg | **Fuel Tank Capacity** 13.6 L

ENGINE

Engine Type SOHC 8-valve parallel twin with 270° crank and uni-cam | **Displacement** 1084 cc | **Cooling System** Liquid Cooled | **Fuel Supply System** PGM-FI (Programmed Fuel Injection System) | **Bore x Stroke** 92 x 81.5 mm | **Compression Ratio** 10.1 : 1 | **Max. Power** 64 kW / 7,000 rpm | **Max. Torque** 98 Nm / 4,750 rpm | **Transmission** 6 Speed, DCT | **Starting System** Electric | **Clutch System** 2 Multiplate Wet Clutches with Coil Spring | **Lubrication Type** Dry (Pressing and Spray) | **Oil Capacity** 4 L periodic exchange

FRAME

Frame Type Diamond Type, Steel | **Front Tires** 130/70B18M/C 63H | **Rear Tires** 180/65B16M/C 81H | **Front Brake** Radial Mounted Monoblock 4-piston Brake Caliper, 330 mm Floating Single Disc - ABS | **Rear Brake** Single Piston Caliper, 256 mm Single Disc - ABS | **Brake System** ABS 2 Channel | **Front Suspension** 43 mm Showa Telescopic Front Suspension, Adj. | **Rear Suspension** Showa Twin Piggyback Suspension, Adj.

ELECTRICAL

Ignition Type Full Transisterized, Battery | **Battery** MF-Wet 12V 11.2Ah (10h) | **Spark Plug Type** NGK SILMAR8A9S | **Headlight** LED

Disclaimer: Accessories Sold Separately
 Photos in the brochure may differ from the actual units sold in Indonesia



www.astra-honda.com

