


Dual-4K Monitor Hybrid Docking Station - Dual HDMI®, Dual DP, or HDMI & DP - USB-C/USB 3.1

Product Diagram (DK30A2DHU/ DK30A2DHUUE)

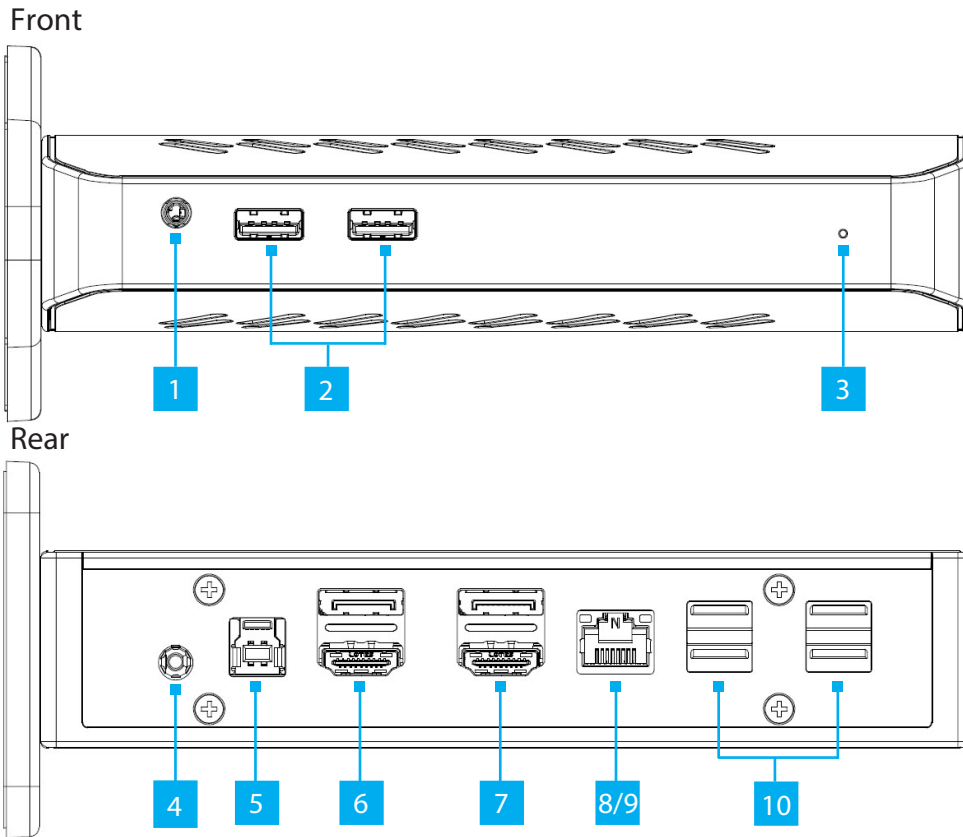

Port/LED	Function
4 DC 20V Port	<ul style="list-style-type: none"> Connect the Universal Power Adapter to supply power to the Docking Station Type-N barrel connector 20V 2A
5 USB-B Host Port	<ul style="list-style-type: none"> Connect the Host Computer
6 Video 1 Ports	<ul style="list-style-type: none"> Connect a DisplayPort Enabled Display Device DisplayPort Version 1.2 --Or-- Connect an HDMI Enabled Display Device HDMI Version 2.0
7 Video 2 Ports	<ul style="list-style-type: none"> Connect a DisplayPort Enabled Display Device DisplayPort Version 1.2 --Or-- Connect an HDMI Enabled Display Device HDMI Version 2.0
8 RJ45 Port	<ul style="list-style-type: none"> Connect a Network Device
9 RJ45 LEDs (above the RJ45 Port)	<ul style="list-style-type: none"> Green: The Docking Station detects a link speed of 10 Mb, 100 Mb, or 1 Gb Flashing Amber: Indicates network activity
10 USB-A Ports x 4	<ul style="list-style-type: none"> Connect a USB Storage Device (e.g. flash drive), or USB Peripheral Device USB-A 3.1/3.0 (5Gbps)

Requirements

Depending on the **Host Laptop's** operating system, the required drivers will automatically be installed when the **Docking Station** is connected and powered on. For the latest drivers, requirements, and instructions, please visit: www.startech.com/DK30A2DHU.

Note: If the drivers do not automatically install, navigate to the **Support** tab to locate the driver installation instructions and downloads.

Port/LED	Function
1 3.5mm Audio Port	<ul style="list-style-type: none"> Connect an Audio Device 4 Position Audio Jack for Headset use
2 USB-A Ports x 2	<ul style="list-style-type: none"> Connect a USB Storage Device (e.g. flash drive), or USB Peripheral Device USB-A 3.1/3.0 (5Gbps)
3 Power LED	<ul style="list-style-type: none"> Solid: The Docking Station is connected and receiving power

Installation

Connecting a Host

- Connect the **USB-C to USB-B Cable** (included) or the **USB-A to USB-B Cable** (included) to the **USB-B Host Port** on the rear of the **Docking Station** and the other end to a **USB Port** on the **Host Computer**.

Connecting the Display Devices

1. Connect a **DisplayPort** or **HDMI Cable** to the **DisplayPort** or **HDMI Enabled Display Device** and to the **Video 1 DisplayPort Port** or **Video 1 HDMI Port** on the rear of the **Docking Station**.
2. Repeat step 2 to add a second **DisplayPort** or **HDMI Enabled Display Device** to the **Video 2 Ports** on the rear of the **Docking Station**.

Connecting Peripherals

1. Connect an **Audio Device** to the **3.5 mm Audio Port** on the front of the **Docking Station**.
2. (Optional) Connect a **USB-A Storage Device** or other **USB-A Peripheral** to the **USB-A Ports** on the front and/or rear of the **Docking Station**. Connect up to 6 total **USB Devices** (2 front, 4 rear).
3. Connect a **CAT5e/6 Cable** to the **RJ45 Port** on the rear of the **Docking Station** and to an **RJ45 Port** on a compatible **Network Device**.

FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by StarTech.com could void the user's authority to operate the equipment.

Industry Canada Statement

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe [B] est conforme à la norme NMB-003 du Canada.

CAN ICES-3 (B)/NMB-3(B)

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

IC Radiation Exposure Statement

This equipment complies with IC RSS-102 radiation exposure limit set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 0.5cm between the radiator and your body.

Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

Powering the Docking Station

1. Select the appropriate regional **Power Cord** and connect it to the **Universal Power Adapter**.
2. Connect the **Universal Power Adapter** to the **DC 20V Port** on the rear of the **Docking Station** and to an **AC Electrical Outlet**.

Operation

Configure the Displays

- Use the Windows or macOS operating system to adjust display settings for multiple **DisplayPort and/or HDMI Enabled Display Devices**.

Warranty Information

This product is backed by a three-year warranty.

For further information on product warranty terms and conditions, please refer to www.startech.com/warranty.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

Safety Measures

- If product has an exposed circuit board, do not touch the product under power.

Mesures de sécurité

- Si l'un des circuits imprimés du produit est visible, ne pas toucher le produit lorsqu'il est sous tension.

安全対策

- 製品に露出した状態の回路基盤が含まれる場合、電源が入っている状態で製品に触らないでください。

Misure di sicurezza

- Se il prodotto ha un circuito stampato visibile, non toccare il prodotto quando è acceso.

Säkerhetsåtgärder

- Rör aldrig vid enheter med oskyddade kretskort när strömmen är påslagen.

StarTech.com Ltd.

45 Artisans Cres
London, Ontario
N5V 5E9
Canada

StarTech.com LLP Ltd.
4490 South Hamilton
Road
Groveport, Ohio
43125
U.S.A.

StarTech.com Ltd.
Unit B, Pinnacle 15
Gowerton Rd,
Brackmills
Northampton
NN4 7BW
United Kingdom

StarTech.com Ltd.
Siriusdreef 17-27
2132 WT Hoofddorp
The Netherlands

FR: startech.com/fr
DE: startech.com/de
ES: startech.com/es
NL: startech.com/nl
IT: startech.com/it
JP: startech.com/jp