



## SPECIFICATIONS

<b>Model Name</b>	PRO B840M-B
<b>CPU Support</b>	Supports AMD Ryzen™ 9000 / 8000 / 7000 Series Desktop Processors
<b>CPU Socket</b>	AMD Socket AM5
<b>Chipset</b>	AMD B840 Chipset
<b>Expansion Slots</b>	1 x PCIe 4.0 x16 slot 1 x PCIe 3.0 x1 slot
<b>Display Interface</b>	Support 4K@60Hz as specified in HDMI™ 2.1, VGA – Requires Processor Graphics
<b>Memory Support</b>	2 DIMMs, Dual Channel DDR5 – 8000+ MT/s (OC)
<b>Storage</b>	2 x M.2 Gen4 x4 64Gbps slots, 4 x SATA 6Gbps ports
<b>USB ports</b>	7 x USB 5Gbps (6 Type-A + 1 Type-C), 6 x USB 2.0
<b>LAN</b>	Realtek® 8125 2.5G LAN
<b>Audio</b>	8-Channel (7.1) HD Audio with Audio Boost

## FEATURES



### EZ PCIe Clip II

Allows for easy removal of the graphics card by pressing the tail-like lock with one finger, even in the cramped case spaces.



### Latest DDR5 Memory

A huge step of DDR performance enhancement with the latest DDR5 memory and MSI Memory Boost technology.



### Lightning Gen4 Solution

The latest Gen4 PCI-E and M.2 solution with up to 64GB/s bandwidth for maximum transfer speed.



### 2.5G Network Solution

Featuring premium 2.5G LAN to deliver better network experience.



### Froze AI Cooling

Detect CPU & GPU temperatures and automatically adjust system fan duty to a proper value.



### EZ Debug LED

Easiest way to troubleshoot.



### Memory Boost

Advanced technology to deliver pure data signals for the best performance, stability and compatibility.



### Core Boost


With premium layout and fully digital power design to support more cores and provide better performance.



### Audio Boost

Reward your ears with studio grade sound quality for the most immersive audio experience.

## CONNECTIONS

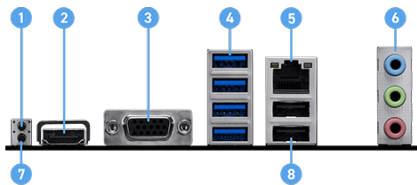

1. Clear CMOS Button
2. HDMI™
3. VGA
4. USB 5Gbps Type-A
5. 2.5G LAN
6. Audio Connectors
7. Flash BIOS Button
8. USB 2.0