



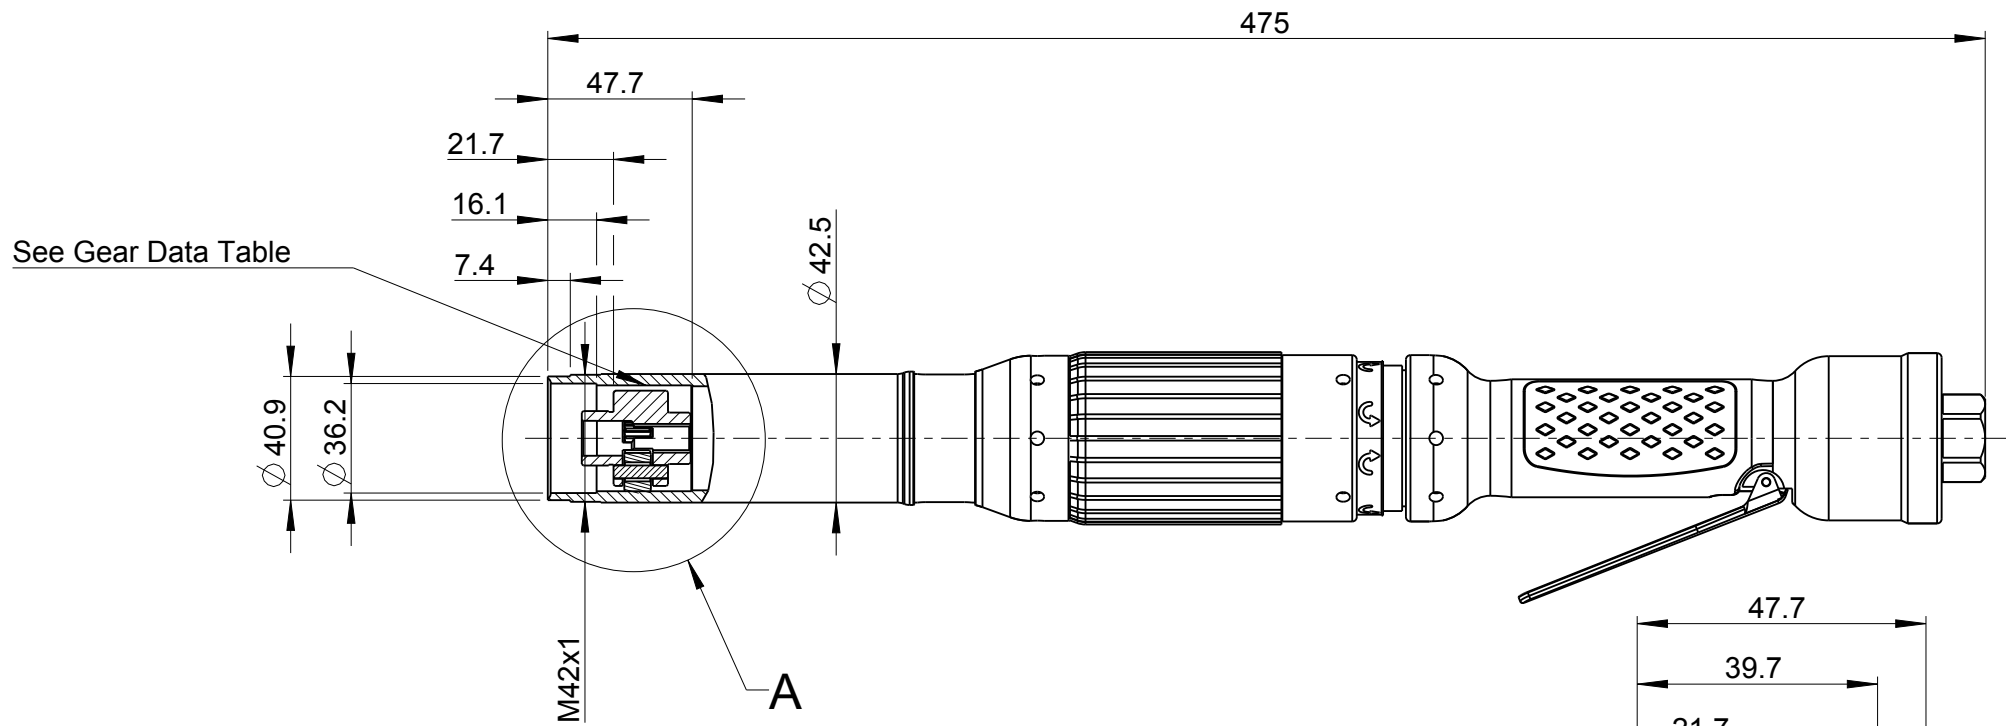

GEAR DATA/KUGGDATA			
Class: ISO 1328 Klass:	8		
Pressure angle Pressvinkel	20°		
Basic rack Referensprofil	AC 4902 K		
Module Normalmodul	0.8		
Number of teeth Kuggtal	45		
Helix angle Snedvinkel	-		
Right or left hand teeth Snedriktning	-		
Addendum modification coefficient Profilförskjutningsfaktor	0.0		
Reference diameter Delningsdiameter	Ø 36		
Chordal tooth thickness Base tangent length over Kordakuggtjocklek kuggvidd över	teeth 33.88	+0.1 -0.0	
Measurement between/over rollers Mått mellan/över mätullar	-		
Rollers' diameter Mätullarnas diameter	Ø 1.4	-	

SPLINE DATA/BOMDATA			
Spline profile and root form Bomprofil och bottenform	-		
Tolerance Tolerans	-		
Guiding Styrning	-		
Pressure angle Pressvinkel	30°		
Delning Pitch	24/48		
Module Modul	-		
Number of teeth Bomantal	11		
Pitch diameter Delningsdiameter	11.64		
Root diameter Bottendiameter			
Base tangent length over 2 teeth on the broach Kuggvidd mått över 2 kuggar på dragbrotsch	4.82	+0.03 +0.0	
Root diameter Bottendiameter	12.7	+0/+0.1	

See Spline Data Table

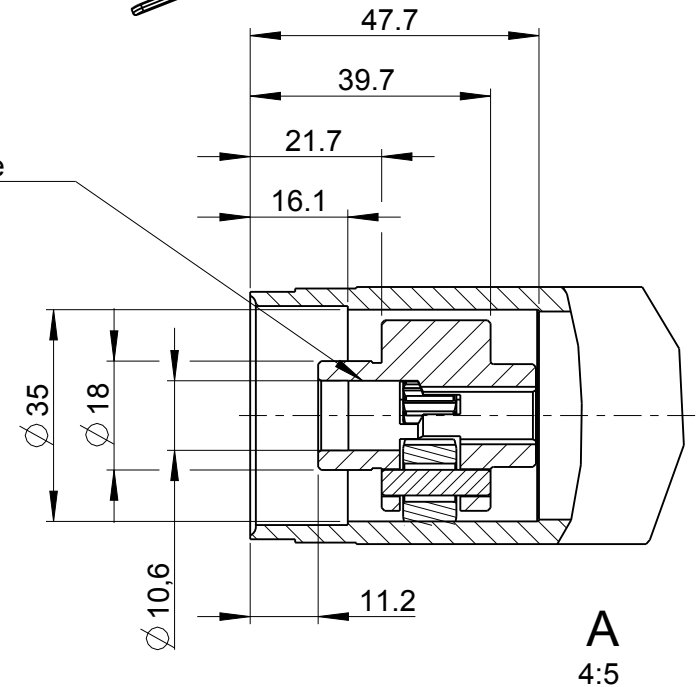

Date	Scale	Ordering No.	Model
2016-08-17	2:5	8431 0534 93	LTV 48 R150-L13

Atlas Copco