



Old designation. ETV STB33-30-10-BCR-IRC-W
New designation: ETV STB33-30-10BCRW

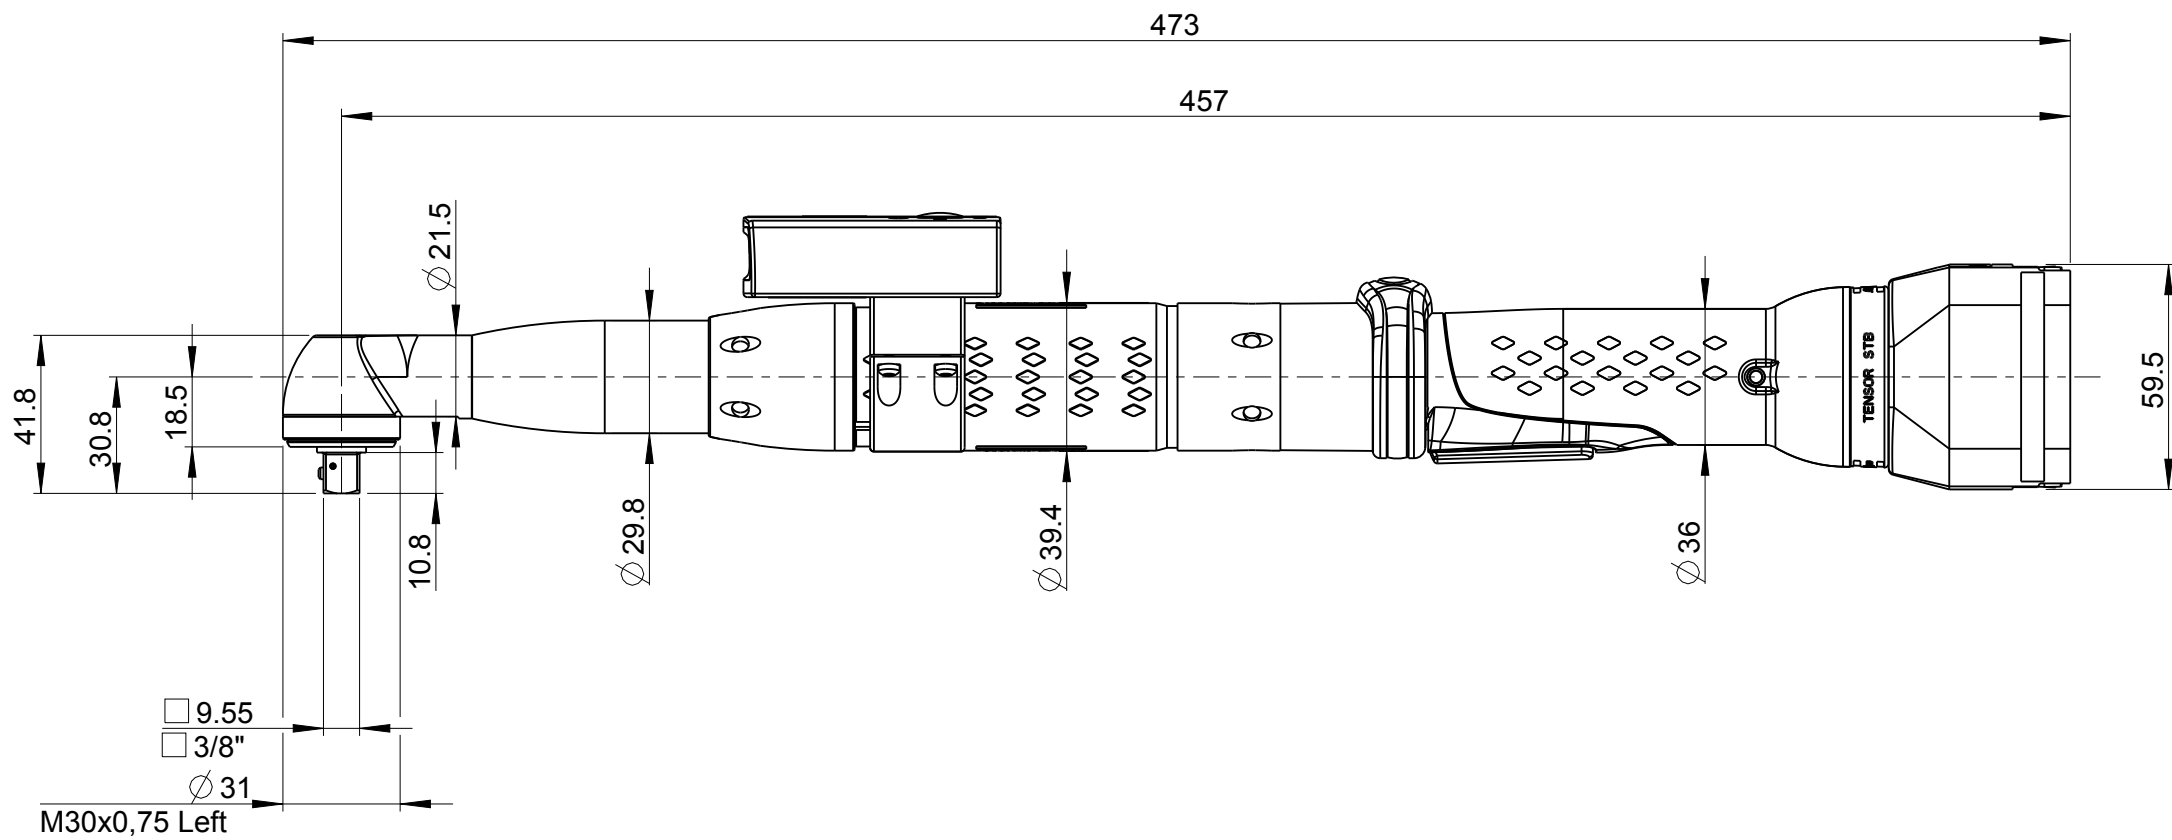

Date	Scale	Ordering No.	Model
2015-06-22	1:2	8433 3019 30	ETV STB33-30-10BCRW

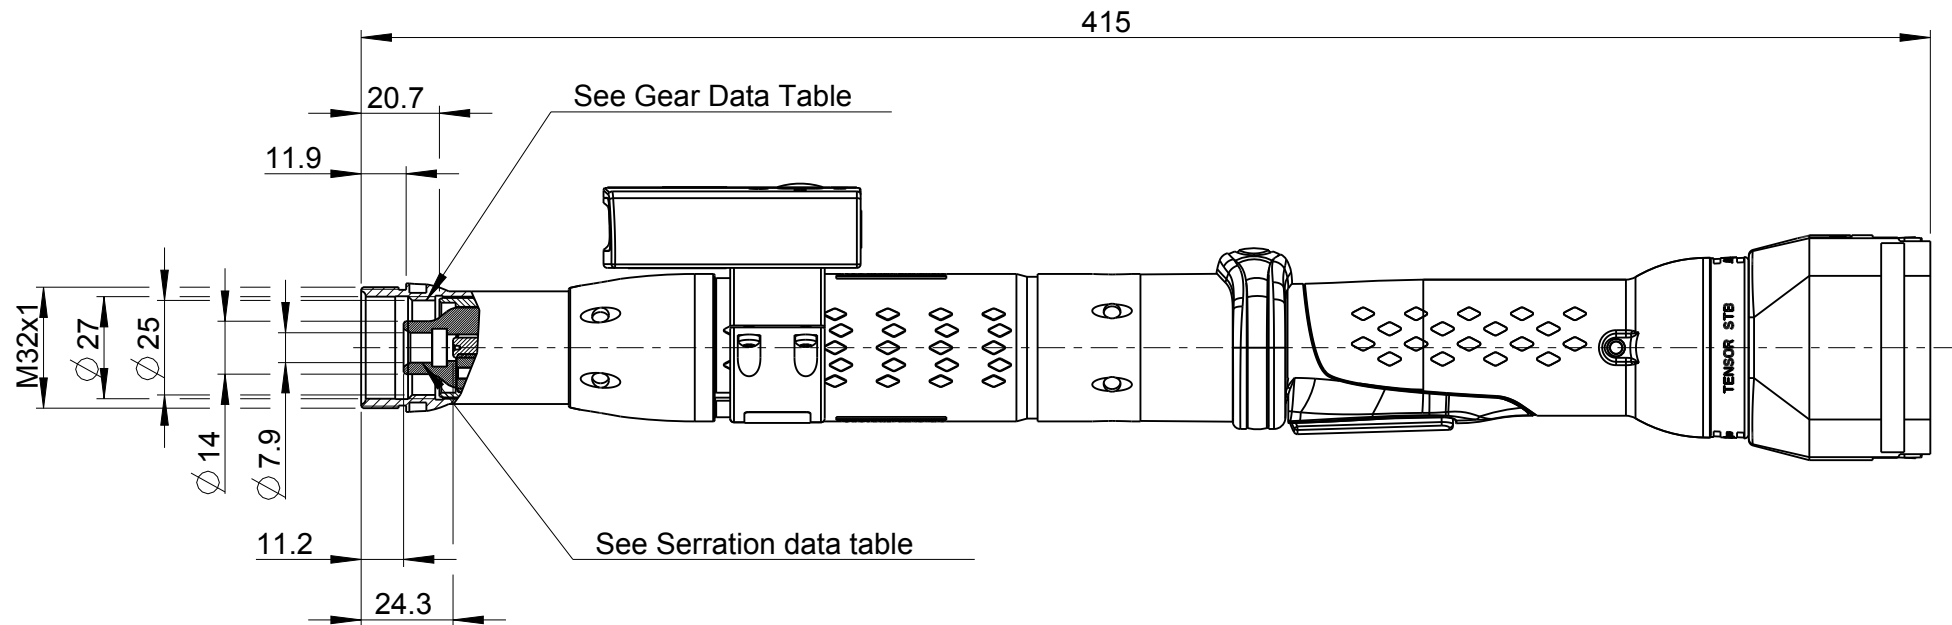

GEAR DATA/KUGGDATA

Class: ISO 1328 Klass:	8
Pressure angle Pressvinkel	20°
Basic rack Referensprofil	AC 4902
Module Normalmodul	0.5
Number of teeth Kuggtal	52
Helix angle Snedvinkel	-
Right or left hand teeth Snedriktning	-
Addendum modification coefficient Profilförskjutningsfaktor	0
Reference diameter Delningsdiameter	∅ 26
Chordal tooth thickness Base tangent length over 6 teeth Kordakuggtjocklek kuggvidd över kuggar	8.49 ^{+0.01} _{-0.03}
Measurement between/over rollers Mått mellan/över mätrollar	25.150-25.260
Rollers' diameter Mätrollarnas diameter	∅ 0.8

SERRATION DATA/BOMDATA

Serration profile and root form Bomprofil och bottenform	SS1834 flat botten
Tolerance Tolerans	-
Guiding Styrning	-
Pressure angle Pressvinkel	-
Pitch -	32/64
Module Modul	-
Serrations Bomantal	11
Pitch diameter Delningsdiameter	8.731
Root diameter Bottendiameter	9.525 H12
Measurement between/over rollers Mått mellan/över mätrollar	+0.100 6.599 +0.037
Rollers' diameter Mätrollarnas diameter	∅ 1.372 ± 0.001

Atlas Copco

Date	Scale	Ordering No.	Model
2015-06-22	1:2	8433 3019 30	ETV STB33-30-10BCRW