

ARTY FRAMER

A small and full-featured contour spotlight



Sharp-edged framing

Gobo projection capability

Comes in many different variations

Arty Framer is a groundbreaking small contour spotlight with all key features built in.

It features a beam angle range of 25–50°, and comes with shutter blades which can be used to create crisp and sharp edges.

Due to its small size, Arty Framer is well-suited for environments with low ceiling heights.

New! Arty Framer is now available with Panlite aka. “PL”, UV-stabilized polycarbonate lenses with excellent clarity. There are slight differences in terms of beam angles and color temperature compared to the regular version.

Arty Framer is available for the following lighting systems:



3-Phase Track
(220–240V AC)

CASAMBI

- Casambi rotary dimmer 0–100%
- Built-in dimmer 0–100%
- DALI



Pico Trac
(12V DC)

- Fixture has built-in 0–100% dimmer
- No external dimming possible
- Easy to install



LED Profile
(Constant current)

- Dimming from the wall switch or app
- Uses external LED driver functions e.g. Casambi, DMX or DALI
- Installation using connector cables



Mini Trac
(12V DC)

- Fixture has built-in 0–100% dimmer
- No external dimming possible
- Easy to install






TECHNICAL SPECIFICATION

Material	Lamp housing made of aluminum, Yoke and details made of steel, Anti-reflective zoom lenses made of glass or PC
Finish	Grey (RAL 7040) Black (RAL 9005) White (RAL 9016)
System	3-phase circuit track Pico Trac Mini Trac LED Profile
Protection class	IP20
Power consumption	6W/8W/10W
Beam angle	25–50°
Color temperatures	2700K, 3000K, 4000K
Swivels	>365°
Tilts	>90°
Weight	280 g
Features	Filter holder, Phase selector, Toolless pan, Tilt lock
Optional accessories	Gobo holder, Gobo pattern

LIGHT DATA

LED lumen	510 lm
Luminaire lumen	286 lm
CRI	90
Red component R9	>60
MacAdam	3-step ellipse (SDCM 3)
TM30–18 Rf	95
TM30–18 Rg	100

* Data from 3000K, 8W/10W, widest beam angle

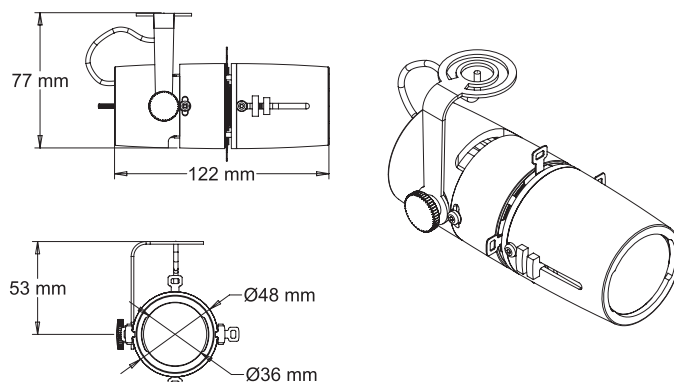

SPOTLIGHTS
ARTY FRAMER



ARTY FRAMER / 230V

Built-in local dimmer (0–100%)
Fits most known 3-phase tracks
Slim profile adapter

2700K	ARTFPL27C-HV-*	Arty Framer PL 230V/10W 2700K	480lm, CRI 90, 25-39°, 3-phase multi, dimmer	NEW
3000K	ARTFPL30C-HV-*	Arty Framer PL 230V/10W 3000K	510lm, CRI 90, 25-39°, 3-phase multi, dimmer	NEW
4000K	ARTFPL40C-HV-*	Arty Framer PL 230V/10W 4000K	540lm, CRI 90, 25-39°, 3-phase multi, dimmer	NEW
2700K	ARTF27C-HV-*	Arty Framer 230V/10W 2700K	480lm, CRI 90, 25-50°, 3-phase multi, dimmer	
3000K	ARTF30C-HV-*	Arty Framer 230V/10W 3000K	510lm, CRI 90, 25-50°, 3-phase multi, dimmer	
4000K	ARTF40C-HV-*	Arty Framer 230V/10W 4000K	540lm, CRI 90, 25-50°, 3-phase multi, dimmer	

* 1: Grey 2: Black 3: White



ARTY FRAMER CASAMBI POT

Casambi rotary dimmer (0–100%)
Adjust Casambi light levels directly on the fixture
Fits most known 3-phase tracks

CASAMBI

2700K	ARTFPL27C-AHC-*	Arty Framer PL 230V/10W Casambi 2700K	480lm, CRI 90, 25-39°, 3-phase, Casambi, dimmer	NEW
3000K	ARTFPL30C-AHC-*	Arty Framer PL 230V/10W Casambi 3000K	510lm, CRI 90, 25-39°, 3-phase, Casambi, dimmer	NEW
4000K	ARTFPL40C-AHC-*	Arty Framer PL 230V/10W Casambi 4000K	540lm, CRI 90, 25-39°, 3-phase, Casambi, dimmer	NEW
2700K	ARTF27C-AHC-*	Arty Framer 230V/10W Casambi 2700K	480lm, CRI 90, 25-50°, 3-phase, Casambi, dimmer	
3000K	ARTF30C-AHC-*	Arty Framer 230V/10W Casambi 3000K	510lm, CRI 90, 25-50°, 3-phase, Casambi, dimmer	
4000K	ARTF40C-AHC-*	Arty Framer 230V/10W Casambi 4000K	540lm, CRI 90, 25-50°, 3-phase, Casambi, dimmer	

* 1: Grey 2: Black 3: White



ARTY FRAMER DALI

DALI (1-100%)
Fits Global Trac Pulse or equivalent track
Slim profile adapter

DALI

2700K	ARTFPL27B-HVDP-*	Arty Framer PL 230V/7W DALI 2700K	420lm, CRI 90, 25-39°, 3-phase, DALI / PULSE ADAPTER	NEW
3000K	ARTFPL30B-HVDP-*	Arty Framer PL 230V/7W DALI 3000K	450lm, CRI 90, 25-39°, 3-phase, DALI / PULSE ADAPTER	NEW
2700K	ARTF27B-HVDP-*	Arty Framer 230V/7W DALI 2700K	420lm, CRI 90, 25-50°, 3-phase, DALI / PULSE ADAPTER	
3000K	ARTF30B-HVDP-*	Arty Framer 230V/7W DALI 3000K	450lm, CRI 90, 25-50°, 3-phase, DALI / PULSE ADAPTER	

* 1: Grey 2: Black 3: White





ARTY FRAMER / MINI TRAC

Built-in local dimmer (0–100%)
Fits Mini Trac

2700K	ARTFPL27C-MT-*	Arty Framers PL 12V DC/8W MiniTrac 2700K	480lm, CRI 90, 25-39°, dimmer	NEW
3000K	ARTFPL30C-MT-*	Arty Framers PL 12V DC/8W MiniTrac 3000K	510lm, CRI 90, 25-39°, dimmer	NEW
4000K	ARTFPL40C-MT-*	Arty Framers PL 12V DC/8W MiniTrac 4000K	540lm, CRI 90, 25-39°, dimmer	NEW
2700K	ARTF27C-MT-*	Arty Framers 12V DC/8W MiniTrac 2700K	480lm, CRI 90, 25-50°, dimmer	
3000K	ARTF30C-MT-*	Arty Framers 12V DC/8W MiniTrac 3000K	510lm, CRI 90, 25-50°, dimmer	
4000K	ARTF40C-MT-*	Arty Framers 12V DC/8W MiniTrac 4000K	540lm, CRI 90, 25-50°, dimmer	

* 1: Grey 2: Black 3: White



ARTY FRAMER / PICO TRAC

Built-in local dimmer (0–100%)
Fits Pico Trac

2700K	ARTFPL27C-PT-*	Arty Framers PL 12V DC/8W PicoTrac 2700K	480lm, CRI 90, 25-39°, dimmer	NEW
3000K	ARTFPL30C-PT-*	Arty Framers PL 12V DC/8W PicoTrac 3000K	510lm, CRI 90, 25-39°, dimmer	NEW
4000K	ARTFPL40C-PT-*	Arty Framers PL 12V DC/8W PicoTrac 4000K	540lm, CRI 90, 25-39°, dimmer	NEW
2700K	ARTF27C-PT-*	Arty Framers 12V DC/8W PicoTrac 2700K	480lm, CRI 90, 25-50°, dimmer	
3000K	ARTF30C-PT-*	Arty Framers 12V DC/8W PicoTrac 3000K	510lm, CRI 90, 25-50°, dimmer	
4000K	ARTF40C-PT-*	Arty Framers 12V DC/8W PicoTrac 4000K	540lm, CRI 90, 25-50°, dimmer	

* 1: Grey 2: Black 3: White



ARTY FRAMER / CCL

For LED Profile
Operated by external LED driver

Arty Framers CC for LED Profile, 500mA

2700K	ARTFPL27B-CCL-*	Arty Framers PL CC/500mA LED-profile 2700K	420lm, CRI 90, Vf=12V, 500mA, 25-39°	NEW
3000K	ARTFPL30B-CCL-*	Arty Framers PL CC/500mA LED-profile 3000K	450lm, CRI 90, Vf=12V, 500mA, 25-39°	NEW
2700K	ARTF27B-CCL-*	Arty Framers CC/500mA LED-profile 2700K	420lm, CRI 90, Vf=12V, 500mA, 25-50°	
3000K	ARTF30B-CCL-*	Arty Framers CC/500mA LED-profile 3000K	450lm, CRI 90, Vf=12V, 500mA, 25-50°	

Arty Framers CC for LED Profile, 1000mA

3000K	ARTFPL30D-CCL-*	Arty Framers PL CC/1000mA LED-profile 3000K	450lm, CRI 90, Vf=6V, 1000mA, 25-39°	NEW
3000K	ARTF30D-CCL-*	Arty Framers CC/1000mA LED-profile 3000K	450lm, CRI 90, Vf=6V, 1000mA, 25-50°	

* 1: Grey 2: Black 3: White

SPOTLIGHTS
ARTY FRAMER



ARTY FRAMER / CC SOLO

No driver / adapter included
Operated by external LED driver

Arty Frammer CC Solo, 500mA

2700K	ARTFPL27B-CCS-*	Arty Frammer PL CC/500mA Solo 2700K	420lm, CRI 90, Vf=12V, 500mA, 25-39°, 1m cable	NEW
3000K	ARTFPL30B-CCS-*	Arty Frammer PL CC/500mA Solo 3000K	450lm, CRI 90, Vf=12V, 500mA, 25-39°, 1m cable	NEW
2700K	ARTF27B-CCS-*	Arty Frammer CC/500mA Solo 2700K	420lm, CRI 90, Vf=12V, 500mA, 25-50°, 1m cable	
3000K	ARTF30B-CCS-*	Arty Frammer CC/500mA Solo 3000K	450lm, CRI 90, Vf=12V, 500mA, 25-50°, 1m cable	

Arty Frammer CC Solo, 1000mA

3000K	ARTFPL30D-CCS-*	Arty Frammer PL CC/1000mA Solo 3000K	450lm, CRI 90, Vf=6V, 1000mA, 25-39°, 1m cable	NEW
3000K	ARTF30D-CCS-*	Arty Frammer CC/1000mA Solo 3000K	450lm, CRI 90, Vf=6V, 1000mA, 25-50°, 1m cable	

* 1: Grey 2: Black 3: White



ARTY FRAMER / 12V DC SOLO

Built-in local dimmer (0-100%)
Operates with 12V DC

2700K	ARTFPL27C-LVS-*	Arty Frammer PL 12V DC/8W Solo 2700K	480lm, CRI 90, 25-39°, dimmer, 1m cable	NEW
3000K	ARTFPL30C-LVS-*	Arty Frammer PL 12V DC/8W Solo 3000K	510lm, CRI 90, 25-39°, dimmer, 1m cable	NEW
4000K	ARTFPL40C-LVS-*	Arty Frammer PL 12V DC/8W Solo 4000K	540lm, CRI 90, 25-39°, dimmer, 1m cable	NEW
2700K	ARTF27C-LVS-*	Arty Frammer 12V DC/8W Solo 2700K	480lm, CRI 90, 25-50°, dimmer, 1m cable	
3000K	ARTF30C-LVS-*	Arty Frammer 12V DC/8W Solo 3000K	510lm, CRI 90, 25-50°, dimmer, 1m cable	
4000K	ARTF40C-LVS-*	Arty Frammer 12V DC/8W Solo 4000K	540lm, CRI 90, 25-50°, dimmer, 1m cable	

* 1: Grey 2: Black 3: White



ARTY FRAMER ACCESSORIES

Accessories for Arty Frammer fixture

BC.470	Glass Gobo Arty, 470 Forest Leaf	Ø 22,5 mm, image size: Ø 14 mm, thickness: 1,1 mm
BC.479	Glass Gobo Arty, 479 Puddle Leaf	Ø 22,5 mm, image size: Ø 14 mm, thickness: 1,1 mm
ARTY92	Arty Gobo holder	
ARTY98	Arty filter Lee and Rosco	Please ask for current selection



