



Up/Down-Angle Cat6 Gigabit Molded UTP Ethernet Cable (RJ45 Up-Angle M to RJ45 Down-Angle M), Blue, 3 ft. (0.91 m)

MODEL NUMBER: N204-003-BL-UD





Cat6 UTP patch cord connects Gigabit Ethernet network components like routers, servers, and switches in high-density data centers.


Features

Cat6 Patch Cable Connects Equipment in Data Centers and VoIP NetworksThis Cat6 UTP patch cable is ideal for connecting network components, such as printers, computers, copiers, routers, servers, modems and switches, in high-density data centers. Designed for fast transmission and excellent signal quality, this RJ45 patch cable ensures data transfer speeds up to 1 Gbps throughout your Gigabit Ethernet or VoIP network.

Up- and Down-Angle RJ45 Patch Cable Makes Connecting and Disconnecting EasierBoth RJ45 male connectors are designed at 90-degree angles: one upward, the other downward. This helps prevent excessive bending and reduce stress on the cable. The space-saving cable is easy to plug into patch panels, switches and other devices located in a confined area or behind a desk.

Color-Coded to Avoid Misidentification That Can Cause Costly DowntimeThis Cat6 patch cable features a blue PVC jacket and molded blue ends. The color-coding allows easy, fast identification in a crowded rack or workstation and helps prevent the cable from becoming inadvertently disconnected.

Specifications

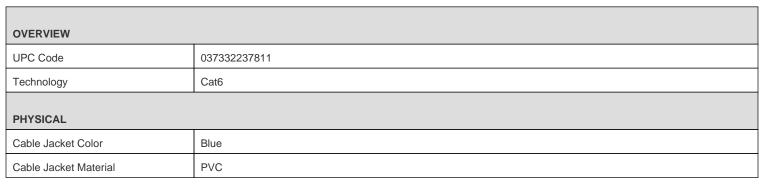

Highlights

- Cat6 Ethernet patch cable delivers fast transmission speeds up to 1 Gbps in your LAN
- Up-angle and down-angle RJ45 ends easy to plug into devices pressed against a wall
- Designed for home or office 10/100/1000Base-T Gigabit Ethernet networks
- Color-coded blue for fast, easy identification in a crowded rack or workstation

Applications

- Build a Gigabit Ethernet or VoIP network through the connection of routers, modems, switches and servers in a high-density data center
- Connect a workstation computer to the company server to gain access to printers, scanners and copiers
- Combine with other Tripp Lite patch cables to set up a colorcoded system in a crowded rack
- Create a connection in a tight space, such as a repurposed server room or behind furniture

Package Includes

 N204-003-BL-UD Cat6 UTP Patch Cable, Up-Angle Male/Down-Angle Male - 3 ft., Blue





Cable Shielding U ⁻ Cable Outer Diameter (OD) 6.0	CM JTP
Cable Outer Diameter (OD) 6.0	
	.0 mm
Number of Conductors 4	Pair
Conductor Material St	Stranded Copper
Conductor Gauge 24	4 AWG
Wire Gauge (OD - mm²)6.0	.0
Cable Length (ft.) 3	
Cable Length (m) 0.5	.91
Cable Length (in.) 36	6
Shipping Dimensions (hwd / in.) 9.	.00 x 7.00 x 0.50
Shipping Weight (lbs.) 0.	.12
Shipping Weight (kg) 0.0	.05
ENVIRONMENTAL	
Operating Temperature Range 14	4° to 122°F (-10° to 50°C)
Storage Temperature Range 5°	° to 140°F (-15° to 60°C)
Relative Humidity 0%	% to 90% RH, Non-Condensing
Operating Humidity Range 0%	% to 90% RH, Non-Condensing
Storage Humidity Range 0%	% to 90% RH, Non-Condensing
COMMUNICATIONS	
Bandwidth per TIA Standard 25	50 MHz
Maximum Bandwidth as Tested 50	00 MHz
Network Compatibility 1	Gbps (Gigabit)
IEEE Standards Supported 80	02.3an; 802.3at
CONNECTIONS	
PoE Capability 30	0W (802.3at)
	RJ45 (MALE) - DOWN ANGLE
Side B - Connector 1 R.	RJ45 (MALE) - UP ANGLE
Crossover Wiring No	lo
Contact Plating Go	Gold
РоЕ Туре Ту	ype 2 PoE+ (30W, IEEE 802.3at)
	folded
	IA/TIA 568B
	/es





FEATURES & SPECIFICATIONS		
Antibacterial	No	
IP68 Rated	No	
Snagless Connector	No	
STANDARDS & COMPLIANCE		
Product Certifications	UL Listed; cUL Listed	
Product Compliance	CE (Europe); RoHS; IEEE 802.3an 10GBase-T; IEEE 802.3at PoE+; REACH; UKCA	
WARRANTY & SUPPORT		
Product Warranty Period (Worldwide)	Lifetime limited warranty	

1000 Eaton Boulevard Cleveland, OH 44122 United States https://tripplite.eaton.com

Γ

© 2024 Eaton. All Rights Reserved. Eaton is a registered trademark. All other trademarks are the property of their respective owners.