



APC GVSUPS30KB4HS uninterruptible power supply (UPS) Double-conversion (Online) 30 kVA 30000 W

Brand : APC

Product code: GVSUPS30KB4HS

Product name : GVSUPS30KB4HS

30 kVA, 30 kW, 40/70Hz, 61 dB, 521x847x1485mm, 460kg


APC GVSUPS30KB4HS uninterruptible power supply (UPS) Double-conversion (Online) 30 kVA 30000 W:



GVSUPS30KB4HS Features

- Galaxy VS UPS 30kW 400V, 2 internal 9Ah smart modular battery strings, expandable to 4, Start-up 5x8
- Highly efficient, easy-to-deploy 30kW, 400V 3-phase UPS that brings best-in-class power protection and low total cost of ownership to edge, small and medium data centers, as well as to critical infrastructure in commercial and industrial applications. Includes 5x8 start-up service and 2 smart high-capacity modular battery strings, expandable to 4 strings for extended runtime. Runtime charts available in the Documents tab.
- Includes: Battery modules ship installed, Dust filter, EcoStruxure Ready ((UPS)), Installation guide, Integrated network management, Power modules ship installed, Start-Up Service

Features		Design	
UPS topology *	Double-conversion (Online)	Form factor *	Tower
Output power capacity *	30 kVA	Product colour *	White
Output power *	30000 W	Display type	LCD
Waveform *	Sine	International Protection (IP) code	IP20
Input operation voltage (min) *	340 V	Certification	CSA C22.2 NO. 107.3, EN/IEC 62040-1, EN/IEC 62040-2, EN/IEC 62040-3, IEC 60721-4-2 Level 2M2, UL 1778 5th edition
Input operation voltage (max) *	460 V		
Input frequency *	40/70 Hz	Operational conditions	
Output operation voltage (min)	380 V	Operating temperature (T-T)	0 - 40 °C
Output operation voltage (max)	415 V	Storage temperature (T-T)	-15 - 40 °C
Output frequency	50/60 Hz	Operating relative humidity (H-H)	0 - 95%
Maximum current	54 A	Storage relative humidity (H-H)	0 - 95%
Number of input phases	3	Operating altitude	0 - 1000 m
Number of output phases	3	Non-operating altitude	0 - 3000 m
Input power factor	0.99	Weight & dimensions	
Crest factor	2.5:1	Width	521 mm
ECO mode	✓	Depth	847 mm
Input current Total Harmonic Distortion (THD)	3%	Height	1485 mm
Noise level	61 dB	Weight	460 kg
Power protection features	Overload, Short circuit	Package width	640 mm
Audible alarm(s)	✓	Package depth	990 mm
Ports & interfaces		Package height	1680 mm
AC outlet types	Hard Wire 3-wire (3PH + G), Hard Wire 5-wire (3PH + N + G)	Package weight	490 kg
SmartSlot	✓	Packaging data	
Battery		Quick installation guide	✓
Battery technology	Sealed Lead Acid (VRLA)	Logistics data	
Battery voltage	480 V	Harmonized System (HS) code	85078000

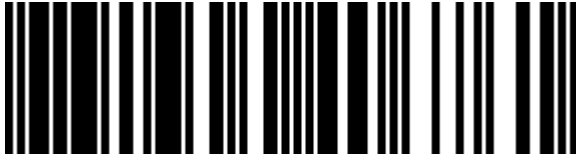

0731304406761



731304406761

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 20-DEC-2024. Prints or copies of Information are only valid on the printed Publication date