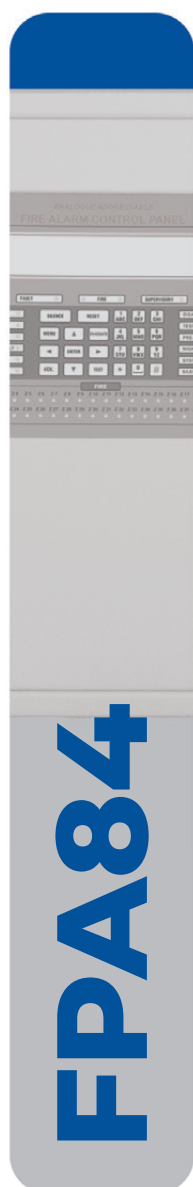# FPA84
Addressable Control Panel

The **FPA84** is a multi-loop analogue addressable control panel compatible with Wizmart analogue addressable devices. It provides a flexible solution for small and medium sized installations.

UL 864 9th Edition

Key Features

- Single loop, expandable to four loops
- Networkable
- Supports any combination of up to 254 addressable devices per loop
- Up to 192 alarm zones
- Pre-alarm action
- 2000 event history storage with real-time clock
- Programmable detector sensitivities
- Networkable using RS-485
- Powerful 32-bit ARM Cortex M3 processor
- USB PC interface
- Optional repeater panel
- Auto-dialler/GSM module option available
- Universal mains supply voltage
- Rugged metal enclosure

TECHNICAL SPECIFICATIONS

OPERATING VOLTAGE	AC(120 ~ 230) V
LOOP VOLTAGE	DC (14 ~ 21) V
ADDRESSABLE LOOPS	4
MAXIMUM NUMBER OF CONNECTED DEVICES	254
ALARM DEVICE CIRCUITS	2
PROGRAMMABLE RELAYS	3 × 2 A @ DC 30 V or 0.5 A @ AC 125 V
OPERATING TEMPERATURE	-0 °C ~ +49 °C
OPERATING HUMIDITY	93 % RH, non-condensing @ 32 °C
DIMENSIONS (H × W × D)	(500 × 400 × 120) mm
WEIGHT	13 kg
INGRESS PROTECTION RATING	IP-50

ORDER CODE Description

FPA84	Addressable control panel